


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2000 <small>Patent fees are subject to annual revision. Small Entity payments <u>must</u> be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12. See 37 C.F.R. §§ 1.27 and 1.28.</small>		Complete if Known		
		Application Number		
		Filing Date	September 21, 2000	
		First Named Inventor	Keizaburo SASAKI	
		Examiner Name		
TOTAL AMOUNT OF PAYMENT (\$)		5,180.00	Group / Art Unit	
			Attorney Docket No.	3815/102

METHOD OF PAYMENT (check one)		FEE CALCULATION (continued)																																																																																																																																																																																					
1. <input type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to. Deposit Account Number: 02-4270 Deposit Account Name: Brown Raysman Millstein Felder & Steiner LLP <input type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR §§ 1.16 and 1.17		3. ADDITIONAL FEES <table border="1"><thead><tr><th>Large Entity Fee Code</th><th>Small Entity Fee Code</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td>105</td><td>130</td><td>205</td><td>65</td><td>Surcharge - late filing fee or oath</td><td></td></tr><tr><td>127</td><td>50</td><td>227</td><td>25</td><td>Surcharge - late provisional filing fee or cover sheet</td><td></td></tr><tr><td>139</td><td>130</td><td>139</td><td>130</td><td>Non-English specification</td><td></td></tr><tr><td>147</td><td>2,520</td><td>147</td><td>2,520</td><td>For filing a request for reexamination</td><td></td></tr><tr><td>112</td><td>920*</td><td>112</td><td>920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr><tr><td>113</td><td>1,840*</td><td>113</td><td>1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr><tr><td>115</td><td>110</td><td>215</td><td>55</td><td>Extension for reply within first month</td><td></td></tr><tr><td>116</td><td>380</td><td>216</td><td>190</td><td>Extension for reply within second month</td><td></td></tr><tr><td>117</td><td>870</td><td>217</td><td>435</td><td>Extension for reply within third month</td><td></td></tr><tr><td>118</td><td>1,360</td><td>218</td><td>680</td><td>Extension for reply within fourth month</td><td></td></tr><tr><td>128</td><td>1,850</td><td>228</td><td>925</td><td>Extension for reply within fifth month</td><td></td></tr><tr><td>119</td><td>300</td><td>219</td><td>150</td><td>Notice of Appeal</td><td></td></tr><tr><td>120</td><td>300</td><td>220</td><td>150</td><td>Filing a brief in support of an appeal</td><td></td></tr><tr><td>121</td><td>260</td><td>221</td><td>130</td><td>Request for oral hearing</td><td></td></tr><tr><td>138</td><td>1,510</td><td>138</td><td>1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr><tr><td>140</td><td>110</td><td>240</td><td>55</td><td>Petition to revive - unavoidable</td><td></td></tr><tr><td>141</td><td>1,210</td><td>241</td><td>605</td><td>Petition to revive - unintentional</td><td></td></tr><tr><td>142</td><td>1,210</td><td>242</td><td>605</td><td>Utility issue fee (or reissue)</td><td></td></tr><tr><td>143</td><td>430</td><td>243</td><td>215</td><td>Design issue fee</td><td></td></tr><tr><td>144</td><td>580</td><td>244</td><td>290</td><td>Plant issue fee</td><td></td></tr><tr><td>122</td><td>130</td><td>122</td><td>130</td><td>Petitions to the Commissioner</td><td></td></tr><tr><td>123</td><td>50</td><td>123</td><td>50</td><td>Petitions related to provisional applications</td><td></td></tr><tr><td>126</td><td>240</td><td>126</td><td>240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr><tr><td>581</td><td>40</td><td>581</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr><tr><td>146</td><td>690</td><td>246</td><td>345</td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr><tr><td>149</td><td>690</td><td>249</td><td>345</td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr><tr><td colspan="2"></td><td colspan="2">Other fee (specify) _____</td><td></td><td></td></tr><tr><td colspan="2"></td><td colspan="2">Other fee (specify) _____</td><td></td><td></td></tr><tr><td colspan="2"></td><td colspan="2">* Reduced by Basic Filing Fee Paid</td><td>SUBTOTAL (3)</td><td>(\$)</td></tr></tbody></table>				Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	105	130	205	65	Surcharge - late filing fee or oath		127	50	227	25	Surcharge - late provisional filing fee or cover sheet		139	130	139	130	Non-English specification		147	2,520	147	2,520	For filing a request for reexamination		112	920*	112	920*	Requesting publication of SIR prior to Examiner action		113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action		115	110	215	55	Extension for reply within first month		116	380	216	190	Extension for reply within second month		117	870	217	435	Extension for reply within third month		118	1,360	218	680	Extension for reply within fourth month		128	1,850	228	925	Extension for reply within fifth month		119	300	219	150	Notice of Appeal		120	300	220	150	Filing a brief in support of an appeal		121	260	221	130	Request for oral hearing		138	1,510	138	1,510	Petition to institute a public use proceeding		140	110	240	55	Petition to revive - unavoidable		141	1,210	241	605	Petition to revive - unintentional		142	1,210	242	605	Utility issue fee (or reissue)		143	430	243	215	Design issue fee		144	580	244	290	Plant issue fee		122	130	122	130	Petitions to the Commissioner		123	50	123	50	Petitions related to provisional applications		126	240	126	240	Submission of Information Disclosure Stmt		581	40	581	40	Recording each patent assignment per property (times number of properties)		146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))		149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))				Other fee (specify) _____						Other fee (specify) _____						* Reduced by Basic Filing Fee Paid		SUBTOTAL (3)	(\$)
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																				
105	130	205	65	Surcharge - late filing fee or oath																																																																																																																																																																																			
127	50	227	25	Surcharge - late provisional filing fee or cover sheet																																																																																																																																																																																			
139	130	139	130	Non-English specification																																																																																																																																																																																			
147	2,520	147	2,520	For filing a request for reexamination																																																																																																																																																																																			
112	920*	112	920*	Requesting publication of SIR prior to Examiner action																																																																																																																																																																																			
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																																																			
115	110	215	55	Extension for reply within first month																																																																																																																																																																																			
116	380	216	190	Extension for reply within second month																																																																																																																																																																																			
117	870	217	435	Extension for reply within third month																																																																																																																																																																																			
118	1,360	218	680	Extension for reply within fourth month																																																																																																																																																																																			
128	1,850	228	925	Extension for reply within fifth month																																																																																																																																																																																			
119	300	219	150	Notice of Appeal																																																																																																																																																																																			
120	300	220	150	Filing a brief in support of an appeal																																																																																																																																																																																			
121	260	221	130	Request for oral hearing																																																																																																																																																																																			
138	1,510	138	1,510	Petition to institute a public use proceeding																																																																																																																																																																																			
140	110	240	55	Petition to revive - unavoidable																																																																																																																																																																																			
141	1,210	241	605	Petition to revive - unintentional																																																																																																																																																																																			
142	1,210	242	605	Utility issue fee (or reissue)																																																																																																																																																																																			
143	430	243	215	Design issue fee																																																																																																																																																																																			
144	580	244	290	Plant issue fee																																																																																																																																																																																			
122	130	122	130	Petitions to the Commissioner																																																																																																																																																																																			
123	50	123	50	Petitions related to provisional applications																																																																																																																																																																																			
126	240	126	240	Submission of Information Disclosure Stmt																																																																																																																																																																																			
581	40	581	40	Recording each patent assignment per property (times number of properties)																																																																																																																																																																																			
146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																																																			
149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																																																			
		Other fee (specify) _____																																																																																																																																																																																					
		Other fee (specify) _____																																																																																																																																																																																					
		* Reduced by Basic Filing Fee Paid		SUBTOTAL (3)	(\$)																																																																																																																																																																																		
FEE CALCULATION 1. BASIC FILING FEE <table border="1"><thead><tr><th>Large Entity Fee Code</th><th>Small Entity Fee Code</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td>101</td><td>690</td><td>201</td><td>345</td><td>Utility filing fee</td><td>690</td></tr><tr><td>106</td><td>310</td><td>206</td><td>155</td><td>Design filing fee</td><td></td></tr><tr><td>107</td><td>480</td><td>207</td><td>240</td><td>Plant filing fee</td><td></td></tr><tr><td>108</td><td>690</td><td>208</td><td>345</td><td>Reissue filing fee</td><td></td></tr><tr><td>114</td><td>150</td><td>214</td><td>75</td><td>Provisional filing fee</td><td></td></tr><tr><td colspan="4">SUBTOTAL (1) (\$)</td><td>690</td></tr></tbody></table> 2. EXTRA CLAIM FEES <table border="1"><thead><tr><th>Total Claims</th><th>Extra Claims</th><th>Fee from below</th><th>Fee Paid</th></tr></thead><tbody><tr><td>60</td><td>-20** = 40</td><td>18.00</td><td>720</td></tr><tr><td>45</td><td>-3** = 42</td><td>78.00</td><td>3510</td></tr><tr><td>Multiple Dependent</td><td>1</td><td></td><td>\$260</td></tr></tbody></table> <small>**or number previously paid, if greater; For Reissues, see below</small> <table border="1"><thead><tr><th>Large Entity Fee Code</th><th>Small Entity Fee Code</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td>103</td><td>18</td><td>203</td><td>9</td><td>Claims in excess of 20</td><td></td></tr><tr><td>102</td><td>78</td><td>202</td><td>39</td><td>Independent claims in excess of 3</td><td></td></tr><tr><td>104</td><td>260</td><td>204</td><td>130</td><td>Multiple dependent claim, if not paid</td><td></td></tr><tr><td>109</td><td>78</td><td>209</td><td>39</td><td>** Reissue independent claims over original patent</td><td></td></tr><tr><td>110</td><td>18</td><td>210</td><td>9</td><td>** Reissue claims in excess of 20 and over original patent</td><td></td></tr><tr><td colspan="4">SUBTOTAL (2) (\$)</td><td>4490</td></tr></tbody></table>		Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	101	690	201	345	Utility filing fee	690	106	310	206	155	Design filing fee		107	480	207	240	Plant filing fee		108	690	208	345	Reissue filing fee		114	150	214	75	Provisional filing fee		SUBTOTAL (1) (\$)				690	Total Claims	Extra Claims	Fee from below	Fee Paid	60	-20** = 40	18.00	720	45	-3** = 42	78.00	3510	Multiple Dependent	1		\$260	Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	103	18	203	9	Claims in excess of 20		102	78	202	39	Independent claims in excess of 3		104	260	204	130	Multiple dependent claim, if not paid		109	78	209	39	** Reissue independent claims over original patent		110	18	210	9	** Reissue claims in excess of 20 and over original patent		SUBTOTAL (2) (\$)				4490																																																																																								
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																				
101	690	201	345	Utility filing fee	690																																																																																																																																																																																		
106	310	206	155	Design filing fee																																																																																																																																																																																			
107	480	207	240	Plant filing fee																																																																																																																																																																																			
108	690	208	345	Reissue filing fee																																																																																																																																																																																			
114	150	214	75	Provisional filing fee																																																																																																																																																																																			
SUBTOTAL (1) (\$)				690																																																																																																																																																																																			
Total Claims	Extra Claims	Fee from below	Fee Paid																																																																																																																																																																																				
60	-20** = 40	18.00	720																																																																																																																																																																																				
45	-3** = 42	78.00	3510																																																																																																																																																																																				
Multiple Dependent	1		\$260																																																																																																																																																																																				
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																				
103	18	203	9	Claims in excess of 20																																																																																																																																																																																			
102	78	202	39	Independent claims in excess of 3																																																																																																																																																																																			
104	260	204	130	Multiple dependent claim, if not paid																																																																																																																																																																																			
109	78	209	39	** Reissue independent claims over original patent																																																																																																																																																																																			
110	18	210	9	** Reissue claims in excess of 20 and over original patent																																																																																																																																																																																			
SUBTOTAL (2) (\$)				4490																																																																																																																																																																																			

SUBMITTED BY		Complete (if applicable)			
Name (Print/Type)	Matthew J. Marquardt, Esq.	Registration No. (Attorney/Agent)	40,997	Telephone	212-827-9489
Signature				Date	September 21, 2000

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Keizaburo Sasaki et al.
Filed : Herewith
Title : DATA CONVERSION APPARATUS, SIGNAL, DATA
CONVERSION METHOD, DCE, GATEWAY AND
COMMUNICATION APPARATUS

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Please enter the following amendment prior to substantive examination of the application
herein:

In the Specification

At page 1, line 1, please delete "is based on" and insert -claims the priority of- in its
place.

Dated: 21 September 2000

Respectfully submitted,



Matthew J. Marquardt
Reg. No. 40,997
Attorney for Applicants
BROWN RAYSMAN MILLSTEIN
FELDER & STEINER LLP
120 West Forty-Fifth Street
New York, New York 10036
(212) 944-1515

APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR(S): Keizaburo SASAKI
Hiroyuki HATTORI
Noriko NIIZATO

INVENTION: DATA CONVERSION APPARATUS,
SIGNAL, DATA CONVERSION
METHOD, DCE, GATEWAY AND
COMMUNICATION APPARATUS

S P E C I F I C A T I O N

001250-12029960

This application is based on Patent Application Nos. 11-266862 filed September 21, 1999 in Japan and 2000-118620 filed April 19, 2000 in Japan, the content of which is incorporated hereinto by reference.

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

10 The present invention relates to a data conversion apparatus, a signal, a data conversion method, a DCE (Data Circuit-terminating Equipment), a gateway and a communication apparatus. More specifically, the present invention relates to a data conversion apparatus etc. for
15 inhibiting octet/bit insertion in a section which does not require octet insertion or bit insertion (hereinafter referred to "octet/bit insertion") during communication on the basis of PPP (Point-to-Point Protocol). The present invention further relates to a communication
20 apparatus which reduces control packet on the communication line.

DESCRIPTION OF THE RELATED ART

25 PPP is present as a data link layer protocol of OSI reference model. PPP is a bit/byte synchronous and an asynchronous link control protocol by a serial circuit.

PPP is specified in RFC (Request For Comments) 1661 and RFC 1662 of IETF (Internet Engineering Task Force).

Fig. 1 is a diagram showing a PPP frame configuration (frame format). The PPP frame has a flag field, address field, control field, protocol field, information field and FCS field. The number of bytes of respective fields are 1 byte for the flag field, 1 byte for the address field, 1 byte for the control field, 1 or 2 bytes for the protocol field, and 2 or 4 bytes for the FCS field. The address field and the control field may sometimes be compressed by negotiation of LCP (Link Control Protocol) ACFC (Address and Control Field Compression). Further, the protocol field may sometimes be compressed by LCPFC (Protocol Field Compression) negotiation. Still further, the FCS (Frame Check Sequence) field may sometimes be compressed by LCPFCS negotiation.

Fig. 2 is a diagram showing an example of communication between DTE (Data Terminal Equipment) through a communication network and PSTN (Public Switched Telephone Network). In Fig. 2, an exchange 8 and a gateway 10 forms a communication network 5. DTE 2 and DTE 14 perform communication through DCE 4, exchange 8, gateway 10 and PSTN12. The communication network 5 can be, for example, a mobile communication network, and DCE 4 be, for example, a mobile station.

In this case, it is considered that data communication between DTE 2 and DTE 14 is performed on the basis of PPP.

Heretofore, when a data signal is transmitted from DTE 2 to DTE 14, the data signal has been transmitted after making octet/bit insertion in DTE 2. Further, in DTE 14, octet deletion or bit deletion (hereinafter referred to

5 "octet/bit deletion") has been performed to the received data signal. On the other hand, when a data signal is transmitted from DTE 14 to DTE 2, octet/bit insertion has been performed in DTE 14, and octet/bit deletion in DTE 2.

10 Further, it is also considered that only data communication between DTE 2 and a given point (point for terminating PPP) in the network is performed on the basis of PPP. As the given point in the network, for example, the exchange 8, the gateway 10 or the like is considered.

15 Here, description is made for a case where the gateway 10 is the terminating point. In the past, when a data signal is transmitted from DTE 2 to DTE 14, octet/bit insertion has been made in DTE 2, octet/bit deletion made on the received data signal in gateway 10, and then the data signal

20 has been transmitted to DTE 14. On the other hand, when transmitting a data signal from DTE 14 to DTE 2, octet/bit insertion has been made in gateway 10, and octet/bit deletion has been made in DTE 2.

However, in data communication based on the prior art

25 PPP, even in a section not requiring octet/bit insertion, a data signal is transmitted and received in the octet/bit inserted state. For example, it is considered that

octet/bit insertion is unnecessary in the section between DCE 4 and gateway 10 in Fig. 2, however, in the prior art, octet/bit insertion has been made even in this section. When octet/bit insertion is made, data transmission amount is increased, and throughput is deteriorated. Octet insertion means, for example, a specific 1-byte data is escape processed with a 1-byte escape character (1 byte) to form a 2-byte data (will be described later in detail with reference to Fig. 9). Further, bit insertion is described using an example, when a flag ("01111110" in binary notation) is to be distinguished from other data portion, bit insertion is made, to data other than the flag, when five "1s" continue, "0" is inserted after the data.

Incidentally, as a DTE data link layer protocol used for the purpose of connecting to internet/intranet through public communication network or private communication network, PPP (Point-to-Point Protocol) is frequently used.

PPP enables transfer of various network protocols such as IP (Internet Protocol), Appletalk, and the like. The PPP specifications are specified as RFC (Request For Comment) of IETF (Internet Engineering Task Force).

Fig. 17 is a diagram showing a communication example. In the example of Fig. 17, a DTE (Data Terminal Equipment) 52 and a DTE 60 perform communication through a DCE (Data Circuit-terminating Equipment) 54, a network 56 and a DCE 58. Here, the DCE 54 and the DCE 58 can be, for example, mobile stations (portable telephones).

Fig. 18 shows a PPP frame format. Flag represents start or end of PPP, and is used for identifying a frame partition. Address field is information representing address of this PPP frame, for which a fixed value is generally used. Control field is information used for identifying frame type, for which a fixed value is generally used. Protocol field is used for identifying the protocol of packet included in the information field, and protocol packet shown in the protocol field is included in the information field. FCS (Frame Check Sequence) is used for making error detection from the address field to the information field.

Fig. 19 shows a PPP procedure. PPP transfers to a link establish phase when a physical layer starts in a link stop phase. In the link establish phase, link setting procedure of LCP (Link Control Protocol) is carried out, after LCP link establishment, transfers to a verification phase, where a verification procedure is carried out as necessary. When verification is successful, PPP transfers to a network layer protocol phase, where NCP link setting procedure corresponding to each network protocol is performed. When each NCP link is established, packet of network protocol corresponding to each NCP becomes transferable. Further, PPP transfers to a link end phase by a communication end request or the like. LCP instructs to transmit an end request packet, when its identification packet is received, so that PPP link is closed and the

physical layer is cut off. Further, close of the PPP link is notified to the network layer. When the physical layer is cut off, PPP returns to the link stop phase.

A LCP or NCP link establish sequence example is shown in Fig. 20. Here, link establish condition is that node A and node B transmit and receive respective setting identification packets. In respective packets, ID is used for correspondence of setting request packet with response packet (setting identification packet, setting negation packet, or setting rejection packet), and ID value received in the request packet is included in the ID value of the response packet. When transmitting a setting request packet, an option (Opt_A~G) can be designated.

Reception side of the setting request packet, when all options included in the setting request packet can be recognized, and those values are all tolerable, accepts all options included in the setting request packet in the setting identification packet and performs a response.

The setting request packet reception side, when an unrecognizable option is present in options included in the setting request packet, in the setting rejection packet makes a response including the unrecognizable option.

The setting request packet reception side, when all options included in the setting request packet are recognizable, however, intolerable option values exist, in the setting negation packet includes only intolerable value option, however, changes these options to tolerable

values and performs a response. Further, when options other than those included in the setting request packet are to be requested to the setting request packet transmission side, those options can also be added to the packet.

The setting request packet transmission side, when receiving a setting rejection packet, such rejected options are removed, and then transmits the setting request packet again.

The setting request packet transmission side, when receiving a setting negation packet, a setting request packet with option values changed to those included in the setting negation packet. However, when a plurality of values exist in the options of the setting negation packet, one of them is selected.

A negotiation procedure example up to LCP or NCP link establishment will be described with reference to Fig. 20.

(a) Setting request (configure request) packet was transmitted from node A to node B, however, lost halfway in the transmission.

(b) Node A, because a response packet to setting request packet of (a) is not received for a certain period of time, transmitted the setting request packet again. At this moment, only ID value was set to a value different from the setting request packet of (a).

(c) Setting request packet was transmitted from node B to node A, however, lost halfway in the transmission.

(d) Node B, because options Opt_C, Opt_D, and Opt_E in the setting request packet of (b) cannot be recognized, made a response including these options in the setting rejection (configure reject) packet.

5 (e) Node A, removed options Opt_C, Opt_D, and Opt_E in the received setting rejection packet of (d), changed the ID value, and then transmitted setting request packet.

(f) Node B, because all options in the received setting request packet of (e) were recognizable and these values are all tolerable, in the setting identification (configure ack (acknowledge)) packet made a response including all options in the setting request packet.

10 (g) Node B, because a response packet to setting request packet of (c) is not received for a certain period of time, transmitted again the setting request packet of the same format as the setting request packet of (c).

(h) Node A, because option Opt_G in the setting request packet of (g) cannot be recognized, made a response including this option in the setting rejection packet.

20 (i) Node B, removed the option Opt_G in the received setting rejection packet of (h), changed the ID value and transmitted the setting request packet.

(j) Node A, because value w2 of the option Opt_A in the setting request packet of (i) is tolerable, however, value z1 of the option Opt_F is intolerable, and it is tolerable if the value is z2, in the setting negation (configure nak (negative acknowledge)) packet changed the

value of option Opt_F to z2 and transmitted it.

(k) Node B, changed option Opt_F in the received setting negation packet of (j) and transmitted the setting request packet.

5 (1) Node A, because all options in the received setting request packet of (k) can be recognized and these values are all tolerable, in the setting identification packet made a response including all options in the setting request packet.

10 An example of LCP link cut sequence is shown in Fig. 21.

(a) Node A transmitted end request (terminate request) packet to require link release.

15 (b) On receiving the end request packet, node B transmitted the end identification (terminate ack) packet. Node A receiving the end identification packet became a link close state.

(c) Node B, after waiting for a certain time from the end identification packet transmission, transmitted an end request packet.

20 (d) Node A, on receiving the end request packet, transmitted the end identification packet, cut off the physical layer, and transferred to the link stop phase. The node B receiving the end identification packet became
25 a link close state, cut off the physical layer, and transferred to the link stop phase.

Fig. 22 shows a keep alive sequence example using LCP

echo request/response packet.

The LCP echo request/response packet is used during LCP link establishment and can be used for determining whether or not the link is held.

5 (a) Node A transmitted LCP echo request packet to confirm whether or not LCP link is maintained.

(b) Node B on receiving the LCP echo request packet, transmitted LCP echo response (echo reply) packet to respond that the link is maintained.

10 (c) Node B transmitted LCP echo request packet to confirm whether or not LCP link is maintained.

(d) Node A on receiving the LCP echo request packet transmitted LCP echo response packet to respond that the link is maintained.

15 As one of characteristics of packet communication, since the communication line is used only when data is generated, a communication node exists in which adoption of a communication fee system based on the data amount is possible. As a requirement in such a communication node,
20 it is desirable that communication fee is not required when user data to be communicated does not exist, that is, actually the communication line is not used.

In the past, when PPP is used as DTE data link layer protocol in a communication node adopting a communication
25 tariff system based on the data amount, by transferring PPP control packets at the communication start time and communication end time, LCP echo request/response packet

for making continuity confirmation of PPP link
periodically, and the like, there are problems that an
extra communication tariff is required from the user point
of view, and communication cost and communication traffic
5 amount tend to increase from the communication enterprise
point of view.

SUMMARY OF THE INVENTION

10 It is therefore an object of the present invention
to inhibit octet/bit insertion in a section not requiring
octet/bit insertion during data communication based on PPP
so that data transmission amount is reduced, thereby
improving the throughput.

15 Another object of the present invention is to reduce
the control packet on the communication line. With this
configuration, reduction of communication
tariff/communication cost and an increase in subscriber
capacity associated with communication traffic amount
20 reduction can be achieved.

In order to accomplish the above mentioned objects,
in a first aspect of the present invention, there is
provided a data conversion apparatus performing octet
deletion or bit deletion to data having a PPP configuration
25 and being octet-inserted or bit-inserted.

In a second aspect of the present invention, there
is provided a data conversion apparatus comprising:

deletion means for performing octet deletion or bit deletion to data having a PPP frame configuration and being octet-inserted or bit-inserted; and

additional information addition means for adding
5 additional information including information for identifying a frame partition to the data octet-deleted or bit-deleted by the deletion means.

In a third aspect of the present invention, there is provided a data conversion apparatus comprising:

10 flag deletion means for deleting a flag from data having a PPP frame configuration and being octet-inserted or bit-inserted; and

deletion means for performing octet deletion or bit deletion to the data flag-deleted by the flag deletion
15 means.

In a fourth aspect of the present invention, there is provided a data conversion apparatus comprising:

flag deletion means for deleting a flag from data having a PPP frame configuration and being octet-inserted
20 or bit-inserted;

deletion means for performing octet deletion or bit deletion to the data flag-deleted by the flag deletion means; and

additional information addition means for adding
25 additional information including information for identifying a frame partition to the data octet-deleted or bit-deleted by the deletion means.

5 In a fifth aspect of the present invention, there is provided a data conversion apparatus performing octet deletion or bit deletion to data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

In a sixth aspect of the present invention, there is provided a data conversion apparatus comprising:

10 additional information deletion means for deleting additional information from data having a frame configuration in which the additional information including information for identifying a frame partition is added to a PPP frame configuration and being not octet-inserted or not bit-inserted; and

15 insertion means for performing octet insertion or bit insertion to the data deleted of additional information by the additional information deletion means.

In a seventh aspect of the present invention, there is provided a data conversion apparatus comprising:

20 insertion means for performing octet insertion or bit insertion to data having a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted; and

flag addition means for adding a flag to the data octet-inserted or bit-inserted by the insertion means.

25 In an eighth aspect of the present invention, there is provided a data conversion apparatus comprising:

additional information deletion means for deleting

additional information from data having a frame configuration in which the additional information including information for identifying frame partition is added to a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted;

insertion means for performing octet insertion or bit insertion to the data additional information-deleted by the additional information deletion means; and

10 flag addition means for adding a flag to the data octet-inserted or bit-inserted by the insertion means.

In a ninth aspect of the present invention, there is provided a data conversion apparatus converting data having a PPP frame configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a tenth aspect of the present invention, there is provided a data conversion apparatus converting data having a frame configuration in which additional information including information for identifying a frame partition is added to a PPP frame configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

25 In an eleventh aspect of the present invention, there is provided a data conversion apparatus converting data having a frame configuration flag-deleted from a PPP frame

configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a twelfth aspect of the present invention, there
5 is provided a data conversion apparatus converting data having a frame configuration in which additional information including information for identifying frame partition is added to a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted
10 or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a thirteenth aspect of the present invention, there
is provided a data conversion apparatus converting data having a frame configuration of data link layer protocol
15 other than a PPP into data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

In a fourteenth aspect of the present invention, there
is provided a data conversion apparatus converting data having a frame configuration of data link layer protocol
20 other than a PPP into data having a frame configuration in which additional information including information for identifying frame partition is added to a PPP frame configuration and being not octet-inserted or not bit-inserted.

In a fifteenth aspect of the present invention, there
25 is provided a data conversion apparatus converting data having a frame configuration of data link layer protocol

other than a PPP into data having a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted.

5 In a sixteenth aspect of the present invention, there is provided a data conversion apparatus converting data having a frame configuration of data link layer protocol other than a PPP into data having a frame configuration flag-deleted from a PPP frame configuration to which additional information including information for
10 identifying frame partition is added and being not octet-inserted or not bit-inserted.

In a seventeenth aspect of the present invention, there is provided a signal having a PPP frame configuration and including data not octet-inserted or not bit-inserted.

15 In an eighteenth aspect of the present invention, there is provided a signal having a PPP frame configuration to which additional information including information for identifying frame partition is added and including data not octet-inserted or not bit-inserted.

20 In a nineteenth aspect of the present invention, there is provided a signal having a frame configuration of flag-deleted from a PPP frame configuration and including data not octet-inserted or not bit-inserted.

In a twentieth aspect of the present invention, there
25 is provided a signal having a frame configuration of flag-deleted from a PPP frame configuration to which additional information including information for

identifying frame partition is added and including data not octet-inserted or not bit-inserted.

In a twenty-first aspect of the present invention, there is provided a data conversion method performing octet
5 deletion or bit deletion to data having a PPP frame configuration and being octet-inserted or bit-inserted.

In a twenty-second aspect of the present invention, there is provided a data conversion method comprising:

a deletion step for performing octet deletion or bit
10 deletion to data having a PPP frame configuration and being octet-inserted or bit-inserted; and

an additional information addition step for adding additional information including information for
identifying a frame partition to the data octet-deleted
15 or bit-deleted by the deletion step.

In a twenty-third aspect of the present invention, there is provided a data conversion method comprising:

a flag deletion step for deleting a flag from data
having a PPP frame configuration and being octet-inserted
20 or bit-inserted; and

a deletion step for performing octet deletion or bit deletion to the data flag-deleted by the flag deletion step.

In a twenty-fourth aspect of the present invention,
25 there is provided a data conversion method comprising:

a flag deletion step for deleting a flag from data having a PPP frame configuration and being octet-inserted

or bit-inserted;

a deletion step for performing octet deletion or bit deletion to the data flag-deleted by the flag deletion step; and

- 5 an additional information addition step for adding additional information including information for identifying a frame partition to the data octet-deleted or bit-deleted by the deletion step.

10 In a twenty-fifth aspect of the present invention, there is provided a data conversion method performing octet insertion or bit insertion to data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

15 In a twenty-sixth aspect of the present invention, there is provided a data conversion method comprising:

an additional information deletion step for deleting additional information from data having a PPP frame configuration to which the additional information including information for identifying a frame partition and being octet-inserted or bit-inserted is added; and

20

an insertion step for performing octet insertion or bit insertion to the data additional information-deleted by the additional information deletion step.

25 In a twenty-seventh aspect of the present invention, there is provided a data conversion method comprising:

an insertion step for performing octet insertion or bit insertion to data having a frame configuration

flag-deleted from a PPP frame configuration and being not
octet-inserted or not bit-inserted; and

a flag addition step for adding a flag to the data
octet-inserted or bit-inserted by the insertion step.

5 In a twenty-eighth aspect of the present invention,
there is provided a data conversion method comprising:

an additional information deletion step for deleting
additional information from data having a frame
configuration flag deleted from a PPP frame configuration
10 to which the additional information including information
for identifying a frame partition is added and being not
octet-inserted or not bit-inserted;

an insertion step for performing octet insertion or
bit insertion to the data additional information-deleted
15 by the additional information deletion step; and

a flag addition step for adding a flag to the data
octet-inserted or bit-inserted by the insertion step.

In a twenty-ninth aspect of the present invention,
there is provided a data conversion method converting data
20 having a PPP frame configuration and being not octet-
inserted or not bit-inserted into data having a frame
configuration of data link layer protocol other than PPP.

In a thirtieth aspect of the present invention, there
is provided a data conversion method converting data having
25 a frame configuration in which additional information
including information for identifying frame partition is
added to a PPP frame configuration and being not

octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a thirty-first aspect of the present invention, there is provided a data conversion method for converting
5 data having a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a thirty-second aspect of the present invention,
10 there is provided a data conversion method converting data having a frame configuration in which additional information including information for identifying frame partition is added to a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted
15 or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

In a thirty-third aspect of the present invention, there is provided a data conversion method converting data having a frame configuration of data link layer protocol
20 other than PPP into data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

In a thirty-fourth aspect of the present invention, there is provided a data conversion method converting data having a frame configuration of data link layer protocol
25 other than PPP into data having a frame configuration in which additional information including information for identifying frame partition is added to a PPP frame

configuration and being not octet-inserted or not bit-inserted.

In a thirty-fifth aspect of the present invention, there is provided a data conversion method converting data
5 having a frame configuration of data link layer protocol other than PPP into data having a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted.

In a thirty-sixth aspect of the present invention,
10 there is provided a data conversion method converting data having a frame configuration of data link layer protocol other than PPP into data having a frame configuration flag-deleted from a PPP frame configuration to which additional information including information for
15 identifying frame partition is added and being not octet-inserted or not bit-inserted.

In a thirty-seventh aspect of the present invention, there is provided a DCE transmitting a LCP echo reply to one of two apparatus performing data communication based
20 on PPP, when the DCE receives a LCP echo request transmitted by the one apparatus to the other apparatus.

In a thirty-eighth aspect of the present invention, there is provided a DCE discarding a LCP discard request, when the DCE receives the LCP discard request transmitted
25 by one of two apparatus performing data communication based on PPP to the other.

In a thirty-ninth aspect of the present invention,

there is provided a gateway transmitting a LCP echo reply to one of two apparatus performing data communication based on PPP, when the gateway receives a LCP echo request transmitted by the one apparatus to the other apparatus.

5 In a fortieth aspect of the present invention, there is provided a gateway discarding a LCP discard request, when the gateway receives the LCP discard request transmitted by one of two apparatus performing data communication based on PPP to the other.

10 In a forty-first aspect of the present invention, there is provided a communication apparatus located between another communication apparatus of self-node and a communication apparatus of other node,

producing a setting request packet according to a
15 setting rejection packet or a setting negation packet and transmitting the setting request packet to the another communication apparatus of self-node, when the communication apparatus receives the setting rejection packet or the setting negation packet from the another
20 communication apparatus of self-node, after intermediating a setting request packet from the communication apparatus of other node to the another communication apparatus of self-node.

Here, the communication apparatus may notify setting
25 rejection or setting negation to the communication apparatus of other node by transmitting only information included in a setting rejection packet or a setting

negation packet to the communication apparatus of other node, when the communication apparatus receives the setting rejection packet or the setting negation packet from the another communication apparatus of self-node, 5 after intermediating a setting request packet from the communication apparatus of other node to the another communication apparatus of self-node.

Here, the communication apparatus may terminate a setting identification packet when the communication 10 apparatus receives the setting identification packet after intermediating a setting request packet from the communication apparatus of other node to the another communication apparatus of self-node and receiving a setting rejection packet or a setting negation packet from 15 the another communication apparatus of self-node, and the communication apparatus is able to not terminate a setting identification packet when the communication apparatus receives the setting identification packet without receiving a setting rejection packet or a setting negation 20 packet from the another communication apparatus of self-node after intermediating a setting request packet from the communication apparatus of other node to the another communication apparatus of self-node.

In a forty-second aspect of the present invention, 25 there is provided a communication apparatus located between another communication apparatus of self-node and a communication apparatus of other node,

terminating a setting request packet, when the communication apparatus receives the setting request packet after intermediating a setting request packet from the another communication apparatus of self-node to the other node communication apparatus and a notification of setting rejection or setting negation from the other node communication apparatus to the another communication of self-node.

Here, the communication apparatus may produce a setting rejection packet or a setting negation packet and transmit it to the another communication apparatus of self-node, when the communication apparatus receives a notification of setting rejection or setting negation from the communication apparatus of other node after intermediating a setting request packet from the another communication apparatus of self-node to the other node communication apparatus.

Here, the communication apparatus may produce a setting identification packet and transmit it to the another communication apparatus of self-node, when the communication apparatus receives from the another communication apparatus of self-node, all of setting request packets according to notifications of setting rejection or setting negation from the communication apparatus of other node to the another communication of self-node after intermediating setting request packets from the another communication apparatus of self-node to

the other node communication apparatus and the notifications.

In a forty-third aspect of the present invention, there is provided a communication apparatus located
5 between another communication apparatus of self-node and a communication apparatus of other node,

producing an end identification packet and transmitting it to the another communication apparatus of self-node after intermediating a notification of end
10 request from the another communication apparatus of self-node to the other node communication.

Here, the communication apparatus may produce an end request signal and transmit it to the communication apparatus of other node, when the communication apparatus
15 receives an end request packet from the another communication apparatus of self-node.

Here, the communication apparatus may produce an end request packet and transmit it to the another communication apparatus of self-node, when the communication apparatus
20 receives a notification of end identification from the communication apparatus of other node after intermediating a notification of end request from the another communication apparatus of self-node to the communication apparatus of other node.

25 Here, the communication apparatus may terminate an end identification packet, when the communication apparatus receives the end identification packet from the

another communication apparatus of self-node after transmitting the produced end request packet.

In a forty-fourth aspect of the present invention, there is provided a communication apparatus located
5 between another communication apparatus of self-node and a communication apparatus of other node,

terminating an end identification packet, when the communication apparatus receives the end identification packet from the another communication apparatus of
10 self-node after intermediating a notification of end request from the other node communication apparatus to the another communication apparatus of self-node.

Here, the communication apparatus may produce an end request packet and transmit it to the another communication
15 apparatus of self-node, when the communication apparatus receives a notification of end request from the other node communication apparatus.

Here, the communication apparatus may produce an end identification signal and transmit it to the communication
20 apparatus of other node, when the communication apparatus receives an end request packet from the another communication apparatus of self-node after intermediating a notification of end request from the other node communication apparatus to the another communication
25 apparatus of self-node.

Here, the communication apparatus may produce an end identification packet and transmit it to the another

communication apparatus of self-node after transmitting the produced end identification signal.

In a forty-fifth aspect of the present invention, there is provided a communication apparatus located
5 between another communication apparatus of self-node and a communication apparatus of other node,

terminating an echo request, producing an echo response packet and transmits it to the another communication apparatus of self-node, when the
10 communication apparatus receives the echo request packet from the another communication apparatus of self-node to the other node communication apparatus.

Here, the communication apparatus may be a mobile station.

15 With the above configuration, during PPP-based communication, in a section not requiring octet/bit insertion, octet/bit insertion is not performed so that data transmission amount is reduced, thereby improving the throughput. When the data transmission amount can be
20 reduced, the users can be provided with various services at low cost.

Further, control packet on the communication line can be reduced.

The above and other objects, effects, features and
25 advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying

drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 is a diagram showing PPP frame construction;

 Fig. 2 is a diagram showing an example of communication between DTEs through a communication network and PSTN;

 Fig. 3 is a diagram showing an example of improved frame construction according to a first embodiment of the present invention;

 Fig. 4 is a diagram for explaining data communication between DTE 2 and DTE 14;

 Fig. 5 is a diagram showing construction example of a first data conversion apparatus;

15 Fig. 6 is a diagram showing construction example of a second data conversion apparatus;

 Fig. 7 is a diagram showing a negotiation processing example when data is generated in DTE 2;

 Fig. 8 is a diagram showing a processing example of DTE 2 and DCE 4 when transferring data from DTE 2 to DTE 14;

 Fig. 9 is a diagram showing a practical example of octet insertion processing performed in DTE 2;

 Fig. 10 is a diagram showing a practical example of octet deletion processing performed in DCE 4;

 Fig. 11 is a diagram showing a processing example of DTE 2 and DCE 4 when transferring data from DTE 14 to DTE

2;

Fig. 12 is a diagram showing a practical example of octet insertion processing performed in DCE 4;

Fig. 13 is a diagram showing a practical example of octet deletion processing performed in DTE 2;

Fig. 14 is a diagram for explaining data communication between DTE 2 and gateway 10;

Fig. 15 is a diagram for explaining bit insertion;

Fig. 16 is a diagram for explaining processing performed in DCE;

Fig. 17 is a diagram showing a communication example;

Fig. 18 is an explanation diagram showing field construction of PPP frame;

Fig. 19 is an explanation diagram showing outline of PPP procedure;

Fig. 20 is a sequence diagram showing a PPP link establish sequence example;

Fig. 21 is a sequence diagram showing a PPP link cut-off sequence example;

Fig. 22 is a sequence diagram showing a PPP keep alive operation;

Fig. 23 is a sequence diagram when the present invention is applied to the link establish sequence example of Fig. 20;

Fig. 24 is a sequence diagram when the present invention is applied to the link cut-off sequence example of Fig. 21; and

Fig. 25 is a sequence diagram when the present invention is applied to the keep alive sequence example of Fig. 22.

5 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following, embodiments of the present invention will be described in detail with reference to the drawings.

In the first and second embodiments, an example of
10 communication between DTEs through the communication network and PSTN shown in Fig. 2 will be described.

[First Embodiment]

In the first embodiment of the present invention, data
15 communication between DTE 2 and DTE 14 is performed on the basis of PPP.

Fig. 3 is a diagram showing an example of improved PPP frame construction according to the present embodiment. The improved PPP frame has an additional
20 information field, an address field, a control field, a protocol field, an information field and a FCS field. That is, the frame has a frame construction in which additional information is added to a frame construction with the flag deleted from the PPP frame construction. The additional
25 information includes identification information for identifying frame partition. In the present embodiment, frame length (number of bytes of the frame) is used as the

identification information.

Further, a frame construction with a flag added to the frame construction of Fig. 3 can also be used. That is, it is also possible that, without deleting the flag
5 from the PPP frame construction, but the additional information is simply added.

Fig. 4 is a diagram for explaining data communication between DTE 2 and DTE 14. When transmitting a data signal from DTE 2 to DTE 14, octet insertion is performed in DTE
10 2 to the data as in the prior art, and then the result is transmitted. In DCE 4, a special processing (this processing will be described below) is performed, in which the data having the PPP frame construction and octet inserted is converted to data which has an improved frame construction (Fig. 3) and is not octet inserted. In the
15 gateway 10 (indicated by NW in Fig. 4), a special processing is performed, whereby the data having the improved PPP frame construction and not octet inserted is converted to data which has the PPP frame construction and is octet
20 inserted. After the data conversion, the gateway 10 transmits the signal including the converted data to DTE 14. Then, in DTE 14, octet deletion is performed as in the prior art.

On the other hand, when transmitting a data signal
25 from DTE 14 to DTE 2, octet insertion is performed in DTE 14 to the data as in the prior art, and the data transmitted. In the gateway 10, a special processing is performed, in

which the data having the PPP frame construction and octet inserted is converted to data which has an improved frame construction and is not octet inserted. In DCE 4, a special processing is performed, whereby the data having the improved PPP frame construction and not octet inserted is converted to data which has the PPP frame construction and is octet inserted. Then, in DTE 2, octet deletion is performed as in the prior art.

As described above, between DCE 4 and gateway 10, a signal including data having the improved PPP frame construction shown in Fig. 3 and not octet inserted is transmitted. With this method, data transmission amount is reduced and the throughput improved.

In DCE 4 and gateway 10, to perform the above special processing, a first data conversion apparatus 20 and a second data conversion apparatus 30.

Fig. 5 is a diagram showing construction example of the first data conversion apparatus. The first data conversion apparatus 20 comprises a flag deletion part 22, an octet deletion part 24 and an additional information addition part 26. When using a frame construction in which between DCE 4 and gateway 10, a flag is added (remained) to the frame construction of Fig. 3, the flag deletion part 22 is unnecessary.

Fig. 6 is a diagram showing a construction example of the second data conversion apparatus. The second data conversion apparatus 30 comprises an additional

information deletion part 32, an octet insertion part 34 and a flag addition part 36. When using a frame construction in which a flag is added between DCE 4 and gateway 10 of the frame construction of Fig. 3, the flag addition part 36 is unnecessary.

Fig. 7 is a diagram showing a negotiation processing example when data is generated in DTE 2. DTE 2, when data is generated, to establish PPP link, transmits LCP link setting request to PPP termination (DTE 14) ((1) of Fig. 7). PPP termination is DTE 14, however, it can be gateway 10 or the like. A case where the PPP termination is gateway 10 will be described in a second embodiment of the present invention. DCE 4 monitors response of LCP and, when ACCM (Async Control Character Map) is included in the response from the DTE 14 side, stores it, receives PPP frame from the DTE 14 side, and utilizes it for octet insertion processing when transmitting to the DTE 2 side (Fig. 7(2)). In the network layer protocol phase after the verification phase (this can be omitted), negotiation of what is used for the network layer protocol (for example, IP (Internet Protocol) is performed in NCP (Network Control Protocol (Fig. 7(3)). As a result, network layer packet becomes usable. In the present embodiment, IP is used as network layer protocol, however, another protocol may be used. After that, data transfer is performed using IP packet (Fig. 7(4)). Negotiation processing when data is generated in DTE 14 can be performed by the above-described

same negotiation processing as well.

Fig. 8 is a diagram showing a processing example of DTE 2 and DCE 4 when transferring data from DTE 2 to DTE 14. In DTE 2, data received from the network layer (NW layer) is provided with an address (A), control (C), protocol (P) and FCS fields, octet insertion processing is performed according to LCP negotiation (Fig. 8(1)), and, after adding flag (F) field, data transfer is performed. Here, since, in the octet insertion, a processing of increasing 1 byte to 2 bytes is performed, the data after octet insertion is greater than the original data. Further, before completion of negotiation, default octet insertion is performed.

In DCE 4, data portion surrounded by flag of data received from DTE 2 is taken out (flag is deleted) by the flag deletion part 22. In the octet deletion part 24, octet deletion processing which is quite the reverse to the octet insertion processing performed by DTE 2 is performed to the taken-out data portion (Fig. 8(2)). In the additional information addition part 26, additional information including identification information for identifying the partition of that 1 frame (information for recognizing that 1 frame) is added (Fig. 8 (3)). In the present embodiment, only identification information is added as the additional information. Further, frame length is used as the identification information. The data provided with the additional information is transferred towards DTE 14.

When a frame construction in which a flag is added (remained) between DCE 4 and gateway 10 in the frame construction of Fig. 3, flag deletion by the flag deletion part 22 is not performed.

5 Fig. 9 is a diagram showing a practical example of octet insertion processing performed in DTE 2. In Fig. 9, octet insertion processing is shown using an example of a case where all of 00h to 1Fh (h indicates hexadecimal notation) are escape processed with escape character (7Dh) by LCP negotiation. In addition to 00h to 1Fh, escape processing is also performed for escape character (7Dh) and flag value (7Eh). In the present embodiment, escape processing is performed by adding escape character (7Dh) before subject data and exclusive ORing subject data with 10 20h. For example, when octet insertion processing is performed on data 00h, data 7D20h is formed. When performing such octet processing, the original data of 1 byte becomes a 2-byte data.

20 Fig. 10 is a diagram showing a practical example of octet deletion processing performed in DCE 4. In the octet deletion processing, the quite reverse processing to the octet insertion processing performed in DTE 2 is performed.

25 Fig. 11 is a diagram showing a processing example of DTE 2 and DCE 4 when transferring data from DTE 14 to DTE 2. In DCE 4, data portion other than additional information of the received signal is taken out (additional information is deleted) in the additional information

deletion part 32 (Fig. 11(1)). To the taken-out data, in the octet insertion part 34, octet insertion is performed according to ACCM negotiation result performed in LCP (Fig. 11(2)), and, after adding a flag in flag addition part 36, data transfer is performed. Here, since octet insertion performs a processing for changing 1 byte to 2 bytes, the data after octet insertion is greater than the original data. Further, before completion of negotiation, default octet insertion is performed.

When using a frame construction in which between DCE 4 and gateway 10, a flag is added (remained) to the frame construction of Fig. 3, the flag deletion part 36 is unnecessary.

In DTE 2, as in the past, octet deletion processing is performed according to the ACCM negotiation result performed in LCP (Fig. 11(3)).

Fig. 12 is a diagram showing a practical example of octet insertion processing performed in DCE 4. The octet insertion processing performed in DCE 4 is the same as the octet insertion processing (Fig. 9) performed in DTE 2.

Fig. 13 is a diagram showing a practical example of octet deletion processing performed in DTE 2. In the octet deletion processing, the quite reverse processing to the octet insertion processing performed in DCE 4 is performed.

The processing (octet insertion processing or the like) performed in gateway 10 when transferring data from DTE 2 to DTE 14 is the same as the processing performed

in DCE 4 (Figs. 11 and 12) when transferring data from DTE 14 to DTE 2.

Further, the processing (octet deletion processing or the like) performed in gateway 10 when transferring data from DTE 14 to DTE 2 is the same as the processing performed in DCE 4 (Figs. 8 and 10) when transferring data from DTE 2 to DTE 14.

Fig. 16 is a diagram for explaining processing performed in DCE.

As codes in LCP format, there are LCP Echo-Request (code: 09h) and LCP Discard-Request (code: 0Bh).

In DCE 4, when one (for example, DTE 2) of two apparatus performing data communication according to PPP receives a LCP echo-request transmitted to the other (for example, DTE 14), a LCP Echo-Reply (code: 0Ah) is transmitted to the one apparatus. This inhibits transmission of LCP echo-request to the other apparatus (transmitted in the past), thereby reducing the data transmission amount.

Further, in DCE 4, when one of two apparatus performing data transmission according to PPP receives a LCP Discard-Request transmitted to the other, the LCP Discard-Request is discarded (deleted). This inhibits transmission of LCP discard-request to the other apparatus (transmitted in the past), thereby reducing the data transmission amount.

Similarly, in gateway 10, when one (for example, DTE 14) of two apparatus performing data communication

according to PPP receives a LCP echo-request transmitted to the other (for example, DTE 2), a LCP echo-reply is transmitted to the one apparatus. This inhibits transmission of LCP echo-request to the other apparatus
5 (transmitted in the past), thereby reducing the data transmission amount.

Further, in gateway 10, when one of two apparatus performing data transmission according to PPP receives a LCP Discard-Request transmitted to the other, the LCP
10 Discard-Request is discarded (deleted). This inhibits transmission of LCP discard-request to the other apparatus (transmitted in the past), thereby reducing the data transmission amount.

In the present embodiment, DCE 4 and gateway 10
15 comprise the first data conversion apparatus 20 and the second data conversion apparatus 30, however, it is also possible that, for example, only the first data conversion apparatus 20 is provided in DCE 4 and gateway 10 is provided with only the second data conversion apparatus 30, so as
20 to use a PPP frame construction improved for use only in one-way data communication.

Still further, in the present embodiment, a special processing (octet insertion, deletion or the like) is performed in gateway 10, however, alternatively, this
25 processing can be performed, for example, in the exchange
8.

[Second Embodiment]

In the second embodiment of the present invention, data communication between DTE 2 and gateway 10 is performed according to PPP.

5 Fig. 14 is a diagram for explaining data communication between DTE 2 and gateway 10. The gateway 10 and DTE 14 are connected with a dedicated line. In the present embodiment, negotiation processing (Fig. 7) is performed between DTE 2 and gateway 10.

10 When transmitting data signal from DTE 2 to DTE 14, octet insertion is performed in DTE 2 to the data as in the past, and the result transmitted. In DCE 4, the same processing as in the first embodiment is performed, so that data having PPP frame construction and octet inserted is
15 converted into data which has improved PPP frame construction (Fig. 3) and is not octet inserted.

Gateway 10 (indicated as NW in Fig. 14) converts data having improved PPP frame construction and not octet inserted into data which has a data link layer protocol
20 frame construction other than PPP. The data conversion can be performed same as in the case of converting data having PPP frame construction into data having frame construction of data link layer protocol other than PPP. In the improved PPP frame construction, instead of the
25 flag, an identification information for identifying a frame partition. After the data conversion, gateway 10 transmits a signal including the converted data to DTE 14.

On the other hand, when transmitting a data signal from DTE 14 to DTE 2, in gateway 10, the data having data link layer protocol frame construction other than PPP is converted into data having improved frame construction and not octet inserted. The data conversion can be performed same as in the case of converting data having data link layer protocol frame construction other than PPP into data having PPP frame construction. After the data conversion, gateway 10 transmits the signal including the converted data to DCE 4.

In DCE 4, the same processing as in the first embodiment is performed, so that data having improved PPP frame construction and not octet inserted is converted into data having PPP frame construction and octet inserted. After that, octet deletion is performed in DTE 2 same as in the past.

As described above, between DCE 4 and gateway 10, a signal including data having improved PPP frame construction and not octet inserted as shown in Fig. 3 is communicated. With this operation, data transmission amount is reduced and the throughput is improved.

Also in the present embodiment, as in the first embodiment, PPP frame construction improved for use in only one-way data communication can be used.

Further, in the present embodiment, a special processing (conversion to data having different frame construction) is performed in gateway 10, however,

alternatively, this processing can also be performed, for example, in the exchange 8 as well.

Still further, also in the present embodiment, DCE 4 and gateway 10 perform the processing shown in Fig. 16.

5

[Others]

The first and second embodiments use additional information, however, if a construction is available which is capable of identifying 1 PPP in a lower layer than PPP, such additional information is unnecessary. In such a case, the additional information addition part 26 and the additional information deletion part 32 are unnecessary.

In the first and second embodiments, the present invention is described in conjunction with octet insertion and deletion, however, the present invention can also be applied to the case of bit insertion and deletion.

Fig. 15 is a diagram for explaining bit insertion. Example of performing octet insertion in DTE 2 is described in Fig. 9, when bit insertion is performed in DTE 2, operation is as shown, for example, in Fig. 15. In the example of Fig. 15, bit insertion is performed, when five "1"s continue to data other than flag, by inserting "0" after that. Since bit deletion is the reverse processing of bit insertion, in bit deletion, when five "1"s continue to data other than flag, "0" after that is deleted.

As described above, with the present invention, during communication according to PPP, in a section not requiring

octet/bit insertion, the octet/bit insertion is inhibited,
so that the data transmission amount can be reduced, and
the throughput be improved. When the data transmission
amount can be reduced, the users can be provided with
5 various services at low cost.

[Third Embodiment]

Fig. 23 shows a sequence diagram when the present
invention is applied to LCP or NCP link establish sequence
example of Fig. 20. A (communication) apparatus 71 and
10 a (communication) apparatus 72 belong to node A, and a
(communication) apparatus 73 and a (communication)
apparatus 74 to node B, which may be physically different
apparatus or same apparatus. Between the apparatus and
15 the apparatus 73 is connected with a communication line.
For example, DTE 2 of Fig. 17 can be corresponded to the
apparatus 71, DCE 4 to the apparatus 72, DEC 8 to the
apparatus 73, and DTE 10 to the apparatus 74, whereby a
redundant packet between DCE 4 and DCE 8 can be deleted.

20 The procedures will be described below.

(a) A setting request packet was transmitted from the
apparatus 71, passed through the apparatus 72, and
disappeared before arrival to node B.

(b) The apparatus 71, since a response packet to the
25 setting request packet of (a) is not received for a certain
period of time, transmitted again the setting request
packet. In this case, only the ID value was set to a value

different from the setting request packet of (a).

(c) A setting request packet was transmitted from the apparatus 74, passed through the apparatus 73, and disappeared before arrival to node A.

5 (d) The apparatus 74, to the setting request packet of (b) received through the apparatus 73, since Opt_C, Opt_D and Opt_E cannot be recognized, in a setting rejection packet made a response including these options.

10 (e) The apparatus 73 did not transfer the setting rejection packet of (d) to the apparatus 72, removed Opt_C, Opt_D and Opt_E to produce a setting request packet with changed ID value and transmitted to the apparatus 74.

15 (f) The apparatus 74, because all options in the received setting request packet of (e) and these values are all tolerable, made a response in a setting identification packet. The apparatus 73, when receiving the setting identification packet from the apparatus 74, transmits only information included in the packet of (d) to the apparatus 72. As in the present example, when the
20 setting identification packet was received after receiving the setting rejection packet or the setting negation packet from the apparatus 74, that setting identification packet is terminated. However, when the setting identification packet was received while not receiving the setting
25 rejection packet or the setting negation packet from the apparatus 74, that setting identification packet is not terminated. In this case, that the setting identification

packet is simply received is notified to the apparatus 72 (for example, by transmitting the setting identification packet).

(g) The apparatus 72 transmits the setting rejection packet produced from information included in the packet of (d) to the apparatus 71. The apparatus 71, on receiving the setting rejection packet from the apparatus 72, removes Opt_C, Opt_D and Opt_E and transmits the setting request packet with changed ID value. The packets of (e) and (g), even though differing in ID value, are setting request packets having the same options.

(h) The apparatus 72 does not transfer the setting request packet of (g) to the apparatus 73, but makes a response in setting identification packet. The packets of (f) and (h), even though differing in ID value, are setting identification packets having the same options.

(i) The apparatus 74, since a response packet to the setting request packet of (c) is not received for a certain period of time, transmits again setting request packet of the same format as the setting request packet of (c).

(j) The apparatus 71, since option Opt_G of the received setting request packet of (i) cannot be recognized, in the setting rejection packet makes a response including the option.

(k) The apparatus 72 does not transfer the setting rejection packet of (j) to the apparatus 73, transmits the setting request packet with the option Opt_G removed and

the ID value changed to the apparatus 71.

(l) The apparatus 71, since the value w2 of the option Opt_A in the received setting request packet of (k) is tolerable, however, it is tolerable if the value of the option Opt_F is not z1 but z2, in the setting negation packet the value of the option Opt_F is changed to z2 and transmitted.

(m) The apparatus 72 does not transfer the setting negation packet of (l) to the apparatus 71, but changes the value of the option Opt_F to z2, and transmits the setting request packet to the apparatus 71.

(n) The apparatus 71, since all options in the received setting request packet of (m) can be recognized and these values are all tolerable, makes a response in the setting identification packet. The apparatus 72, on receiving the setting identification packet, transmits only information included in the packets of (j) and (l) to the apparatus 73.

(o) The apparatus 73, on receiving information included in the packets of (j) and (l) from the apparatus 72, first transmits setting rejection packet produced from information of (j) to the apparatus 74. The packets of (j) and (o) are setting rejection packets having the same options.

(p) The apparatus 74 removes the option Opt_G in the received setting rejection packet of (o), and transmits setting request packet with changed ID value. The packets

of (k) and (p), even though differing in ID value, are setting request packets having the same options.

(q) The apparatus 73 does not transfer the setting request packet of (p) to the apparatus 72, since it is known from information included in the packet of (l) that the value w2 of the option Opt_A is tolerable, however, it is tolerable if the value of the option Opt_F is not z1 but z2, in the setting negation packet changes the value of the option Opt_F to z2 and transmits it to the apparatus 74. The packets of (l) and (q), even though differing in ID value, are setting negation packets having the same options.

(r) The apparatus 74 changes the value of the option Opt_F in the received setting negation packet of (q) to z2 and transmits setting request packet. The packets of (m) and (r), even though differing in ID value, are setting request packets having the same options.

(s) The apparatus 73 does not transmit the setting request packet of (r) to the apparatus 72, since all options in the setting request packet can be recognized and these values are all tolerable, in the setting identification packet makes a response to the apparatus 74. The packets of (n) and (s), even though differing in ID value, are setting identification packets having the same options.

Fig. 24 shows a sequence diagram when the present invention is applied to the LCP link cut-off sequence example of Fig. 21. The procedures will be described

below.

(a) The apparatus 71 transmits end request packet to request link release. The apparatus 72, on receiving the end request packet, transmits a communication end request
5 signal to the apparatus 73. The apparatus 73 on receiving the communication end request signal, produces an end request packet and transmits it to the apparatus 74.

(b) The apparatus 72 on receiving the end request packet from the apparatus 71, transmits end identification
10 packet to the apparatus 71. The apparatus 71 receiving the end identification packet becomes a link close state. On the other hand, the apparatus 74 receiving the end request packet from the apparatus 73 transmits end identification packet. The apparatus 73 does not transfer
15 the end identification packet to the apparatus 72.

(c) The apparatus 74, after the passage of a time from the end identification packet transmission, transmits end request packet. The apparatus 73, on receiving the end request packet, transmits a communication end
20 identification signal to the apparatus 72. The apparatus 72 receiving the communication end identification signal produces end request packet and transmits it to the apparatus 71.

(d) The apparatus 73 receiving the end request packet
25 transmits end identification packet to the apparatus 74. The apparatus 74 receiving the end identification packet transfers to the link close state, and after cutting the

physical link, becomes a link stop phase state. On the other hand, the apparatus 71 receiving the end request packet from the apparatus 72 transmits end identification packet, and after cutting the physical link, becomes link
5 stop phase state. The apparatus 72 does not transfer the end identification packet to the apparatus 73.

Fig. 25 shows a sequence diagram when the present invention is applied to the LCP keep alive sequence example of Fig. 22. The procedures will be described below.

10 (a) The apparatus 71, to confirm whether or not the LCP link is maintained, transmits LCP echo request packet.

(b) The apparatus 72 does not transfer the received LCP echo request packet of (a) to the apparatus 73 but transmits LCP echo response packet to the apparatus 71.

15 (c) The apparatus 74, to confirm whether or not the LCP link is maintained, transmits LCP echo request packet.

(d) The apparatus 73 does not transfer the received LCP echo request packet of (c) to the apparatus 72 but transmits LCP echo response packet to the apparatus 74.

20 As described above, no signal is transferred between the apparatus 72 and the apparatus 73.

In the present embodiment, an example where the present invention is applied to communication according to PPP protocol, however, the present invention can also
25 be applied to communication based on similar protocol.

As described above, with the present invention, control packet on the communication line can be reduced.

With this configuration, redundant packets, for example, in end-to-end PPP link establish procedure, cut-off procedure, and PPP link continuity identification procedure are terminated in the same node, whereby control
5 packet amount transferred on the communication line can be reduced, communication fees and communication cost be reduced, and subscriber capacity be increased in association with reduction of communication traffic amount.

10 The present invention has been described in detail with respect to preferred embodiments, and it will now be apparent from the foregoing to those skilled in the art that changes and modifications may be made without departing from the invention in its broader aspects, and
15 it is the invention, therefore, in the appended claims to cover all such changes and modifications as fall within the true spirit of the invention.

WHAT IS CLAIMED IS:

1. A data conversion apparatus performing octet deletion
or bit deletion to data having a PPP configuration and being
5 octet-inserted or bit-inserted.

2. A data conversion apparatus comprising:
deletion means for performing octet deletion or bit
deletion to data having a PPP frame configuration and being
10 octet-inserted or bit-inserted; and

additional information addition means for adding
additional information including information for
identifying a frame partition to the data octet-deleted
or bit-deleted by said deletion means.

15

3. A data conversion apparatus comprising:

flag deletion means for deleting a flag from data
having a PPP frame configuration and being octet-inserted
or bit-inserted; and

20 deletion means for performing octet deletion or bit
deletion to the data flag-deleted by said flag deletion
means.

4. A data conversion apparatus comprising:

25 flag deletion means for deleting a flag from data
having a PPP frame configuration and being octet-inserted
or bit-inserted;

deletion means for performing octet deletion or bit deletion to the data flag-deleted by said flag deletion means; and

additional information addition means for adding
5 additional information including information for identifying a frame partition to the data octet-deleted or bit-deleted by said deletion means.

5. A data conversion apparatus performing octet deletion
10 or bit deletion to data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

6. A data conversion apparatus comprising:
additional information deletion means for deleting
15 additional information from data having a frame configuration in which said additional information including information for identifying a frame partition is added to a PPP frame configuration and being not octet-inserted or not bit-inserted; and

20 insertion means for performing octet insertion or bit insertion to the data deleted of additional information by said additional information deletion means.

7. A data conversion apparatus comprising:
25 insertion means for performing octet insertion or bit insertion to data having a frame configuration flag-deleted from a PPP frame configuration and being not

octet-inserted or not bit-inserted; and

flag addition means for adding a flag to the data
octet-inserted or bit-inserted by said insertion means.

5 8. A data conversion apparatus comprising:

additional information deletion means for deleting
additional information from data having a frame
configuration in which said additional information
including information for identifying frame partition is
10 added to a frame configuration flag-deleted from a PPP
frame configuration and being not octet-inserted or not
bit-inserted;

insertion means for performing octet insertion or bit
insertion to the data additional information-deleted by
15 said additional information deletion means; and

flag addition means for adding a flag to the data
octet-inserted or bit-inserted by said insertion means.

9. A data conversion apparatus converting data having
20 a PPP frame configuration and being not octet-inserted or
not bit-inserted into data having a frame configuration
of data link layer protocol other than PPP.

10. A data conversion apparatus converting data having
25 a frame configuration in which additional information
including information for identifying a frame partition
is added to a PPP frame configuration and being not

octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

11. A data conversion apparatus converting data having
5 a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

10 12. A data conversion apparatus converting data having a frame configuration in which additional information including information for identifying frame partition is added to a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not
15 bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

13. A data conversion apparatus converting data having a frame configuration of data link layer protocol other
20 than a PPP into data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

14. A data conversion apparatus converting data having a frame configuration of data link layer protocol other
25 than a PPP into data having a frame configuration in which additional information including information for identifying frame partition is added to a PPP frame

configuration and being not octet-inserted or not bit-inserted.

5 15. A data conversion apparatus converting data having a frame configuration of data link layer protocol other than a PPP into data having a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted.

10 16. A data conversion apparatus converting data having a frame configuration of data link layer protocol other than a PPP into data having a frame configuration flag-deleted from a PPP frame configuration to which additional information including information for
15 identifying frame partition is added and being not octet-inserted or not bit-inserted.

17. A signal having a PPP frame configuration and including data not octet-inserted or not bit-inserted.
20

18. A signal having a PPP frame configuration to which additional information including information for identifying frame partition is added and including data not octet-inserted or not bit-inserted.

25 19. A signal having a frame configuration of flag-deleted from a PPP frame configuration and including data not

octet-inserted or not bit-inserted.

20. A signal having a frame configuration of flag-deleted
from a PPP frame configuration to which additional
5 information including information for identifying frame
partition is added and including data not octet-inserted
or not bit-inserted.

21. A data conversion method performing octet deletion
10 or bit deletion to data having a PPP frame configuration
and being octet-inserted or bit-inserted.

22. A data conversion method comprising:
a deletion step for performing octet deletion or bit
15 deletion to data having a PPP frame configuration and being
octet-inserted or bit-inserted; and
an additional information addition step for adding
additional information including information for
identifying a frame partition to the data octet-deleted
20 or bit-deleted by said deletion step.

23. A data conversion method comprising:
a flag deletion step for deleting a flag from data
having a PPP frame configuration and being octet-inserted
25 or bit-inserted; and
a deletion step for performing octet deletion or bit
deletion to the data flag-deleted by said flag deletion

step.

24. A data conversion method comprising:

5 a flag deletion step for deleting a flag from data having a PPP frame configuration and being octet-inserted or bit-inserted;

a deletion step for performing octet deletion or bit deletion to the data flag-deleted by said flag deletion step; and

10 an additional information addition step for adding additional information including information for identifying a frame partition to the data octet-deleted or bit-deleted by said deletion step.

15 25. A data conversion method performing octet insertion or bit insertion to data having a PPP frame configuration and being not octet-inserted or not bit-inserted.

26. A data conversion method comprising:

20 an additional information deletion step for deleting additional information from data having a PPP frame configuration to which said additional information including information for identifying a frame partition and being octet-inserted or bit-inserted is added; and

25 an insertion step for performing octet insertion or bit insertion to the data additional information-deleted by said additional information deletion step.

27. A data conversion method comprising:

an insertion step for performing octet insertion or
bit insertion to data having a frame configuration

5 flag-deleted from a PPP frame configuration and being not
octet-inserted or not bit-inserted; and

a flag addition step for adding a flag to the data
octet-inserted or bit-inserted by said insertion step.

10 28. A data conversion method comprising:

an additional information deletion step for deleting
additional information from data having a frame

configuration flag deleted from a PPP frame configuration
to which said additional information including information
15 for identifying a frame partition is added and being not
octet-inserted or not bit-inserted;

an insertion step for performing octet insertion or
bit insertion to the data additional information-deleted
by said additional information deletion step; and

20 a flag addition step for adding a flag to the data
octet-inserted or bit-inserted by said insertion step.

29. A data conversion method converting data having a PPP
frame configuration and being not octet-inserted or not
25 bit-inserted into data having a frame configuration of data
link layer protocol other than PPP.

30. A data conversion method converting data having a frame configuration in which additional information including information for identifying frame partition is added to a PPP frame configuration and being not
5 octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

31. A data conversion method for converting data having a frame configuration flag-deleted from a PPP frame
10 configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data link layer protocol other than PPP.

32. A data conversion method converting data having a
15 frame configuration in which additional information including information for identifying frame partition is added to a frame configuration flag-deleted from a PPP frame configuration and being not octet-inserted or not bit-inserted into data having a frame configuration of data
20 link layer protocol other than PPP.

33. A data conversion method converting data having a frame configuration of data link layer protocol other than PPP into data having a PPP frame configuration and being
25 not octet-inserted or not bit-inserted.

34. A data conversion method converting data having a

frame configuration of data link layer protocol other than
PPP into data having a frame configuration in which
additional information including information for
identifying frame partition is added to a PPP frame
5 configuration and being not octet-inserted or not bit-
inserted.

35. A data conversion method converting data having a
frame configuration of data link layer protocol other than
10 PPP into data having a frame configuration flag-deleted
from a PPP frame configuration and being not octet-inserted
or not bit-inserted.

36. A data conversion method converting data having a
15 frame configuration of data link layer protocol other than
PPP into data having a frame configuration flag-deleted
from a PPP frame configuration to which additional
information including information for identifying frame
partition is added and being not octet-inserted or not
20 bit-inserted.

37. A DCE transmitting a LCP echo reply to one of two
apparatus performing data communication based on PPP, when
said DCE receives a LCP echo request transmitted by said
25 one apparatus to the other apparatus.

38. A DCE discarding a LCP discard request, when said DCE

receives said LCP discard request transmitted by one of two apparatus performing data communication based on PPP to the other.

5 39. A gateway transmitting a LCP echo reply to one of two apparatus performing data communication based on PPP, when said gateway receives a LCP echo request transmitted by said one apparatus to the other apparatus.

10 40. A gateway discarding a LCP discard request, when said gateway receives said LCP discard request transmitted by one of two apparatus performing data communication based on PPP to the other.

15 41. A communication apparatus located between another communication apparatus of self-node and a communication apparatus of other node,

producing a setting request packet according to a setting rejection packet or a setting negation packet and
20 transmitting said setting request packet to said another communication apparatus of self-node, when said communication apparatus receives said setting rejection packet or said setting negation packet from said another communication apparatus of self-node, after
25 intermediating a setting request packet from said communication apparatus of other node to said another communication apparatus of self-node.

42. The communication apparatus as claimed in Claim 41,
wherein said communication apparatus notifies setting
rejection or setting negation to said communication
5 apparatus of other node by transmitting only information
included in a setting rejection packet or a setting
negation packet to said communication apparatus of other
node, when said communication apparatus receives said
setting rejection packet or said setting negation packet
10 from said another communication apparatus of self-node,
after intermediating a setting request packet from said
communication apparatus of other node to said another
communication apparatus of self-node.

43. The communication apparatus as claimed in Claim 41,
wherein said communication apparatus terminates a setting
identification packet when said communication apparatus
receives said setting identification packet after
intermediating a setting request packet from said
15 communication apparatus of other node to said another
communication apparatus of self-node and receiving a
setting rejection packet or a setting negation packet from
said another communication apparatus of self-node, and
said communication apparatus does not terminate a setting
20 identification packet when said communication apparatus
receives said setting identification packet without
receiving a setting rejection packet or a setting negation
25

packet from said another communication apparatus of self-node after intermediating a setting request packet from said communication apparatus of other node to said another communication apparatus of self-node.

5

44. A communication apparatus located between another communication apparatus of self-node and a communication apparatus of other node,

terminating a setting request packet, when said
10 communication apparatus receives said setting request packet after intermediating a setting request packet from said another communication apparatus of self-node to said other node communication apparatus and a notification of setting rejection or setting negation from said other node
15 communication apparatus to said another communication of self-node.

45. The communication apparatus as claimed in Claim 44, wherein said communication apparatus produces a setting
20 rejection packet or a setting negation packet and transmits it to said another communication apparatus of self-node, when said communication apparatus receives a notification of setting rejection or setting negation from said communication apparatus of other node after intermediating
25 a setting request packet from said another communication apparatus of self-node to said other node communication apparatus.

46. The communication apparatus as claimed in Claim 44,
wherein said communication apparatus produces a setting
identification packet and transmits it to said another
5 communication apparatus of self-node, when said
communication apparatus receives from said another
communication apparatus of self-node, all of setting
request packets according to notifications of setting
rejection or setting negation from said communication
10 apparatus of other node to said another communication of
self-node after intermediating setting request packets
from said another communication apparatus of self-node to
said other node communication apparatus and said
notifications.

15 47. A communication apparatus located between another
communication apparatus of self-node and a communication
apparatus of other node,

producing an end identification packet and
20 transmitting it to said another communication apparatus
of self-node after intermediating a notification of end
request from said another communication apparatus of
self-node to said other node communication.

25 48. The communication apparatus as claimed in Claim 47,
wherein said communication apparatus produces an end
request signal and transmits it to said communication

apparatus of other node, when said communication apparatus receives an end request packet from said another communication apparatus of self-node.

5 49. The communication apparatus as claimed in Claim 47,
wherein said communication apparatus produces an end
request packet and transmits it to said another
communication apparatus of self-node, when said
communication apparatus receives a notification of end
10 identification from said communication apparatus of other
node after intermediating a notification of end request
from said another communication apparatus of self-node to
said communication apparatus of other node.

15 50. The communication apparatus as claimed in Claim 49,
wherein said communication apparatus terminates an end
identification packet, when said communication apparatus
receives said end identification packet from said another
communication apparatus of self-node after transmitting
20 said produced end request packet.

51. A communication apparatus located between another
communication apparatus of self-node and a communication
apparatus of other node,
25 terminating an end identification packet, when said
communication apparatus receives said end identification
packet from said another communication apparatus of

self-node after intermediating a notification of end request from said other node communication apparatus to said another communication apparatus of self-node.

5 52. The communication apparatus as claimed in Claim 51, wherein said communication apparatus produces an end request packet and transmits it to said another communication apparatus of self-node, when said communication apparatus receives a notification of end
10 request from said other node communication apparatus.

53. The communication apparatus as claimed in Claim 51, wherein said communication apparatus produces an end identification signal and transmits it to said
15 communication apparatus of other node, when said communication apparatus receives an end request packet from said another communication apparatus of self-node after intermediating a notification of end request from said other node communication apparatus to said another
20 communication apparatus of self-node.

54. The communication apparatus as claimed in Claim 53, wherein said communication apparatus produces an end identification packet and transmits it to said another
25 communication apparatus of self-node after transmitting said produced end identification signal.

55. A communication apparatus located between another communication apparatus of self-node and a communication apparatus of other node,

terminating an echo request, producing an echo
5 response packet and transmits it to said another communication apparatus of self-node, when said communication apparatus receives said echo request packet from said another communication apparatus of self-node to said other node communication apparatus.

10

56. The communication apparatus as claimed in Claim 41, 44, 47, 51, or 55, wherein said communication apparatus is a mobile station.

ABSTRACT OF THE DISCLOSURE

A data conversion apparatus etc. which inhibits
octet/bit insertion to reduce a data transmission amount
5 and improve a throughput in a section not requiring
octet/bit insertion during communication based on PPP is
provided. Further, a communication apparatus which
reduces a control packet on a communication line is
provided. When transmitting a data signal from DTE to DTE,
10 octet/bit insertion is performed DTE to a data, and
transmission is made. In a DCE, a data having a PPP frame
configuration and being octet/bit-inserted is converted
into a data having an improved PPP frame configuration and
being not octet/bit inserted. In a gateway (NW), a data
15 having the improved PPP frame configuration and being not
octet/bit inserted is converted into a data having the PPP
frame configuration and being octet/bit inserted. After
the data conversion, the gateway transmits a signal
including the converted data to DTE. In DTE, octet/bit
20 deletion is performed as in the prior art.

FLAG	ADDRESS	CONTROL	PROTOCOL	INFORMA- TION	FCS
------	---------	---------	----------	------------------	-----

FIG.1

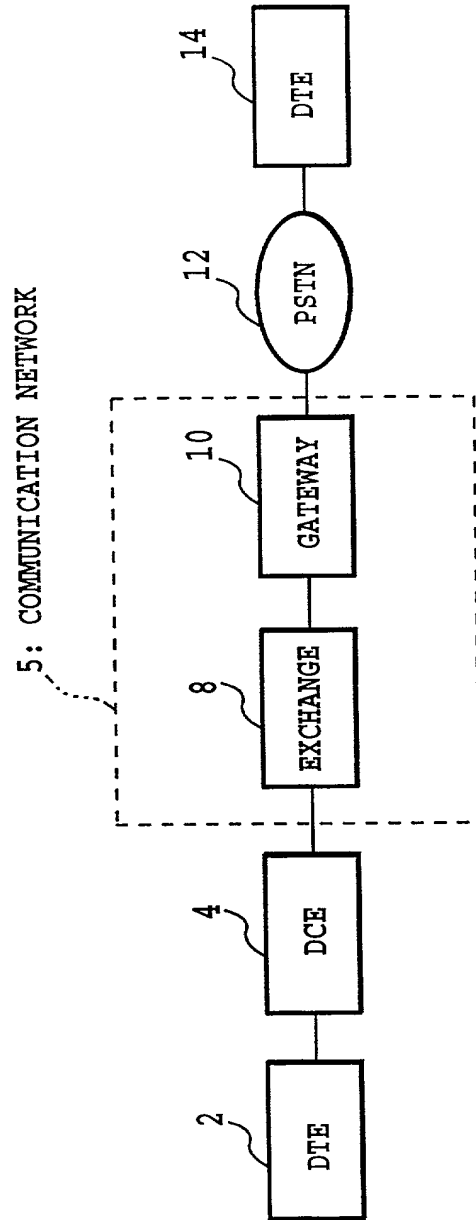


FIG. 2

ADDITIONAL INFORMATION	ADDRESS	CONTROL	PROTOCOL	INFORMATION	FCS
---------------------------	---------	---------	----------	-------------	-----

FIG.3

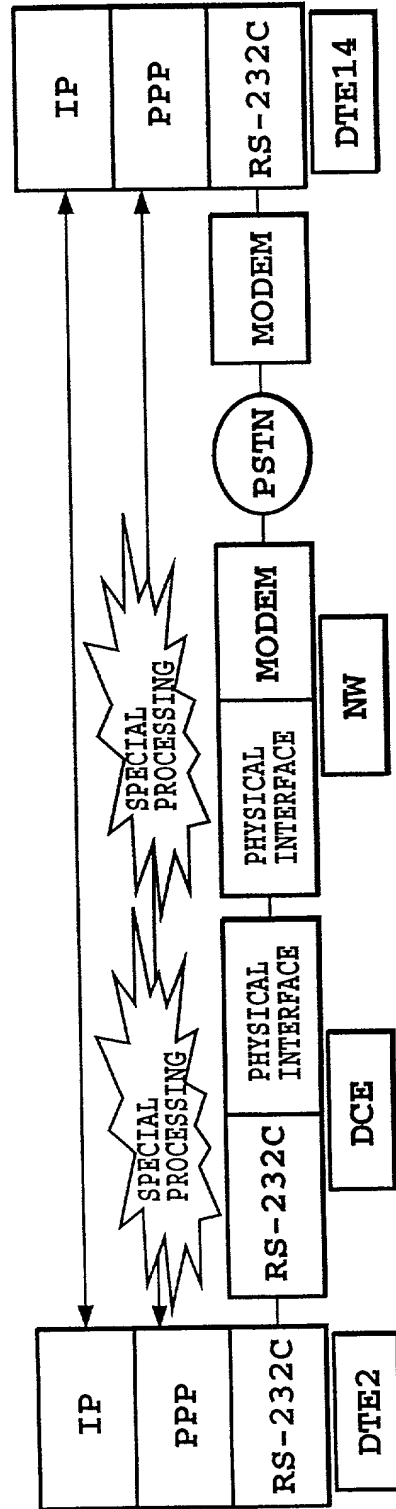


FIG.4

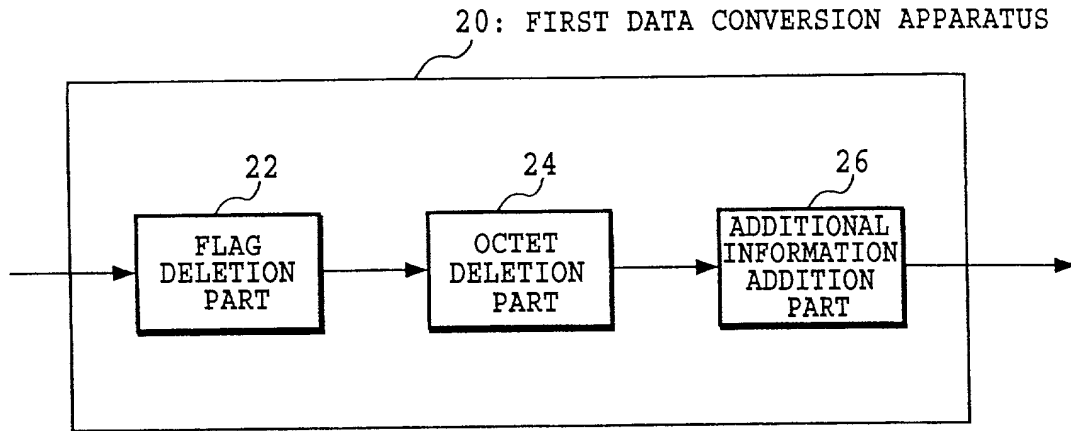


FIG.5

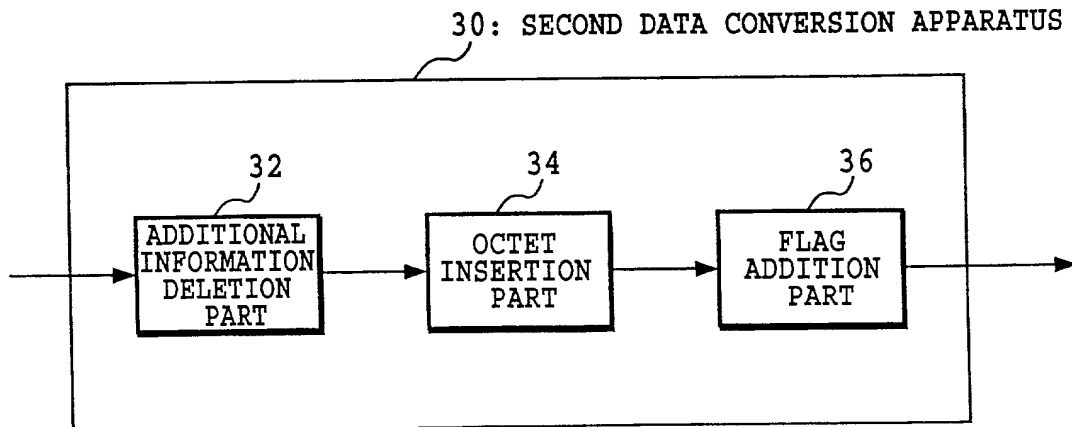


FIG.6



7/24

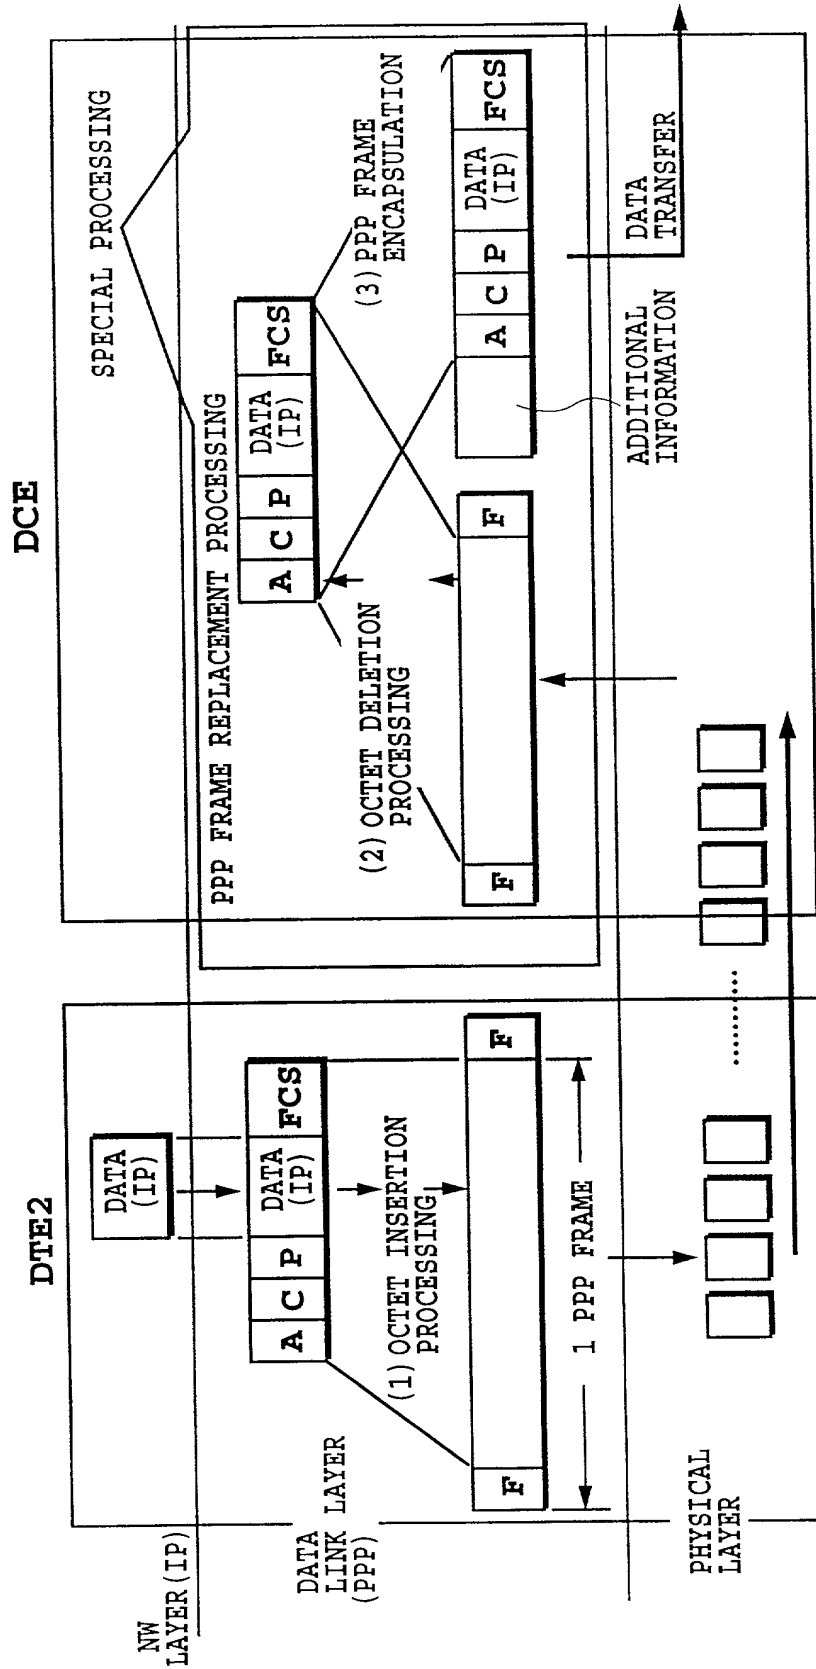


FIG.8

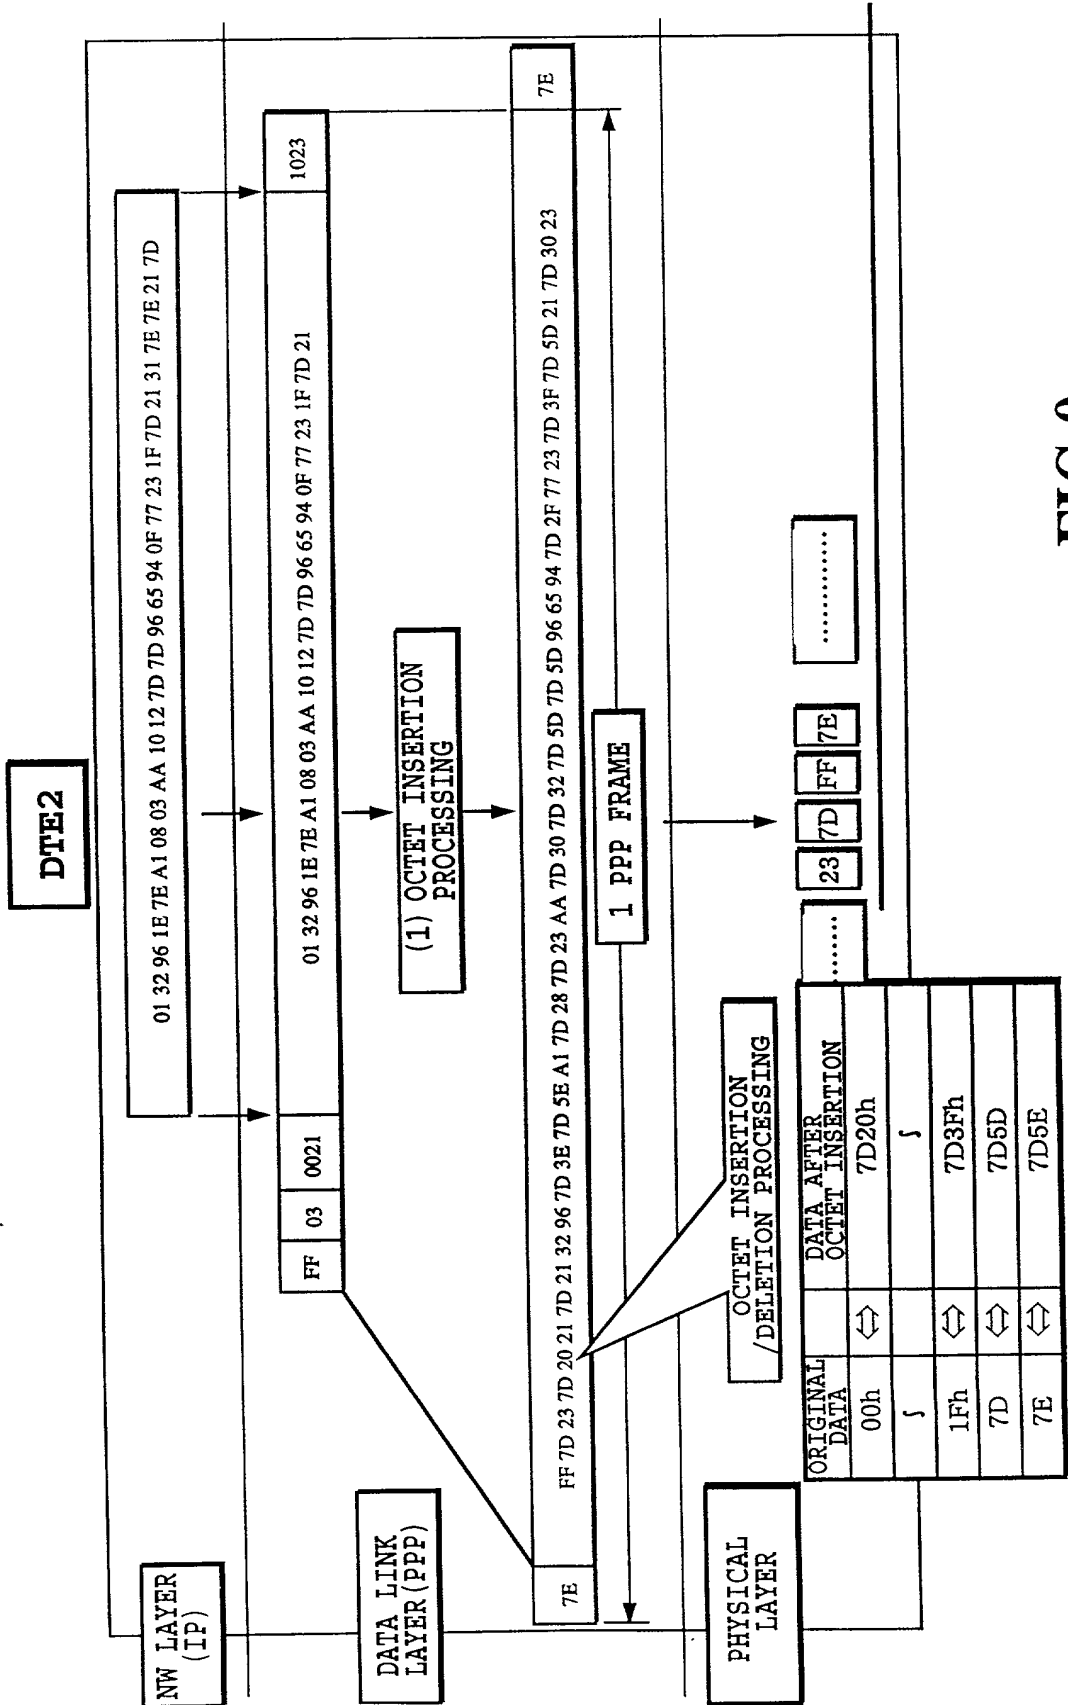


FIG.9

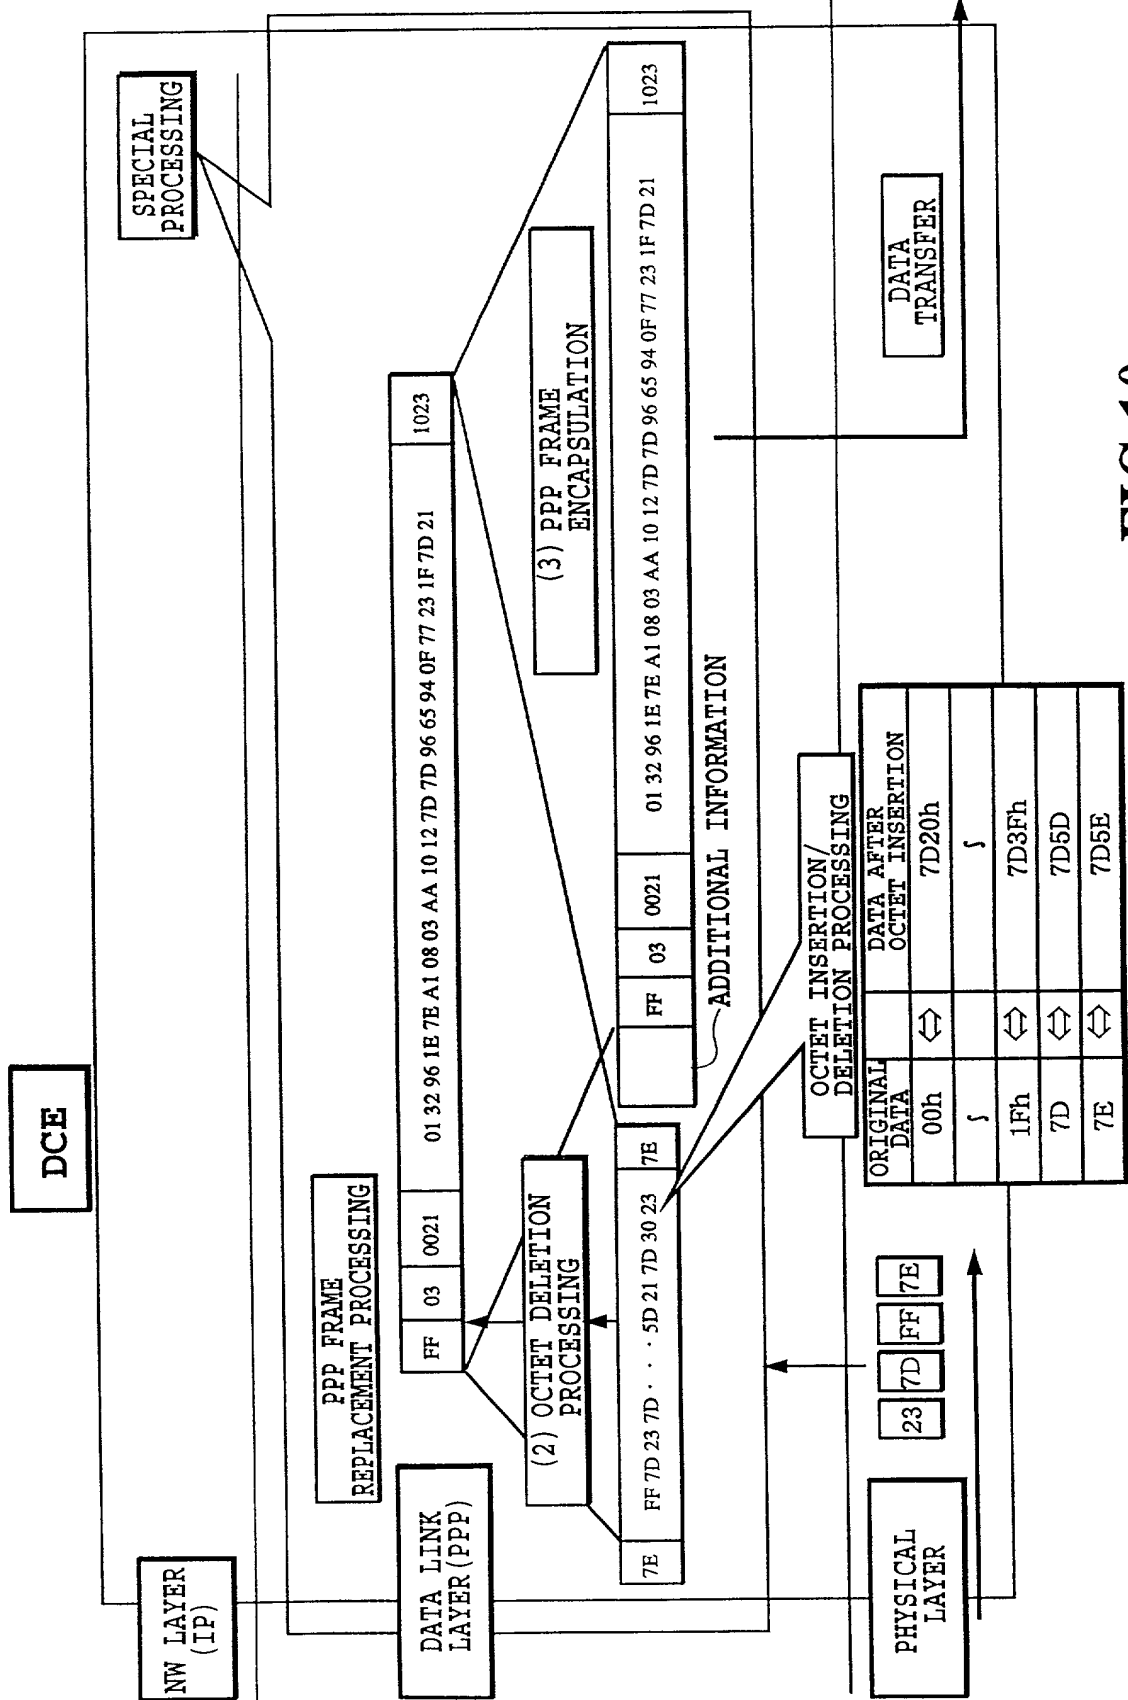


FIG.10

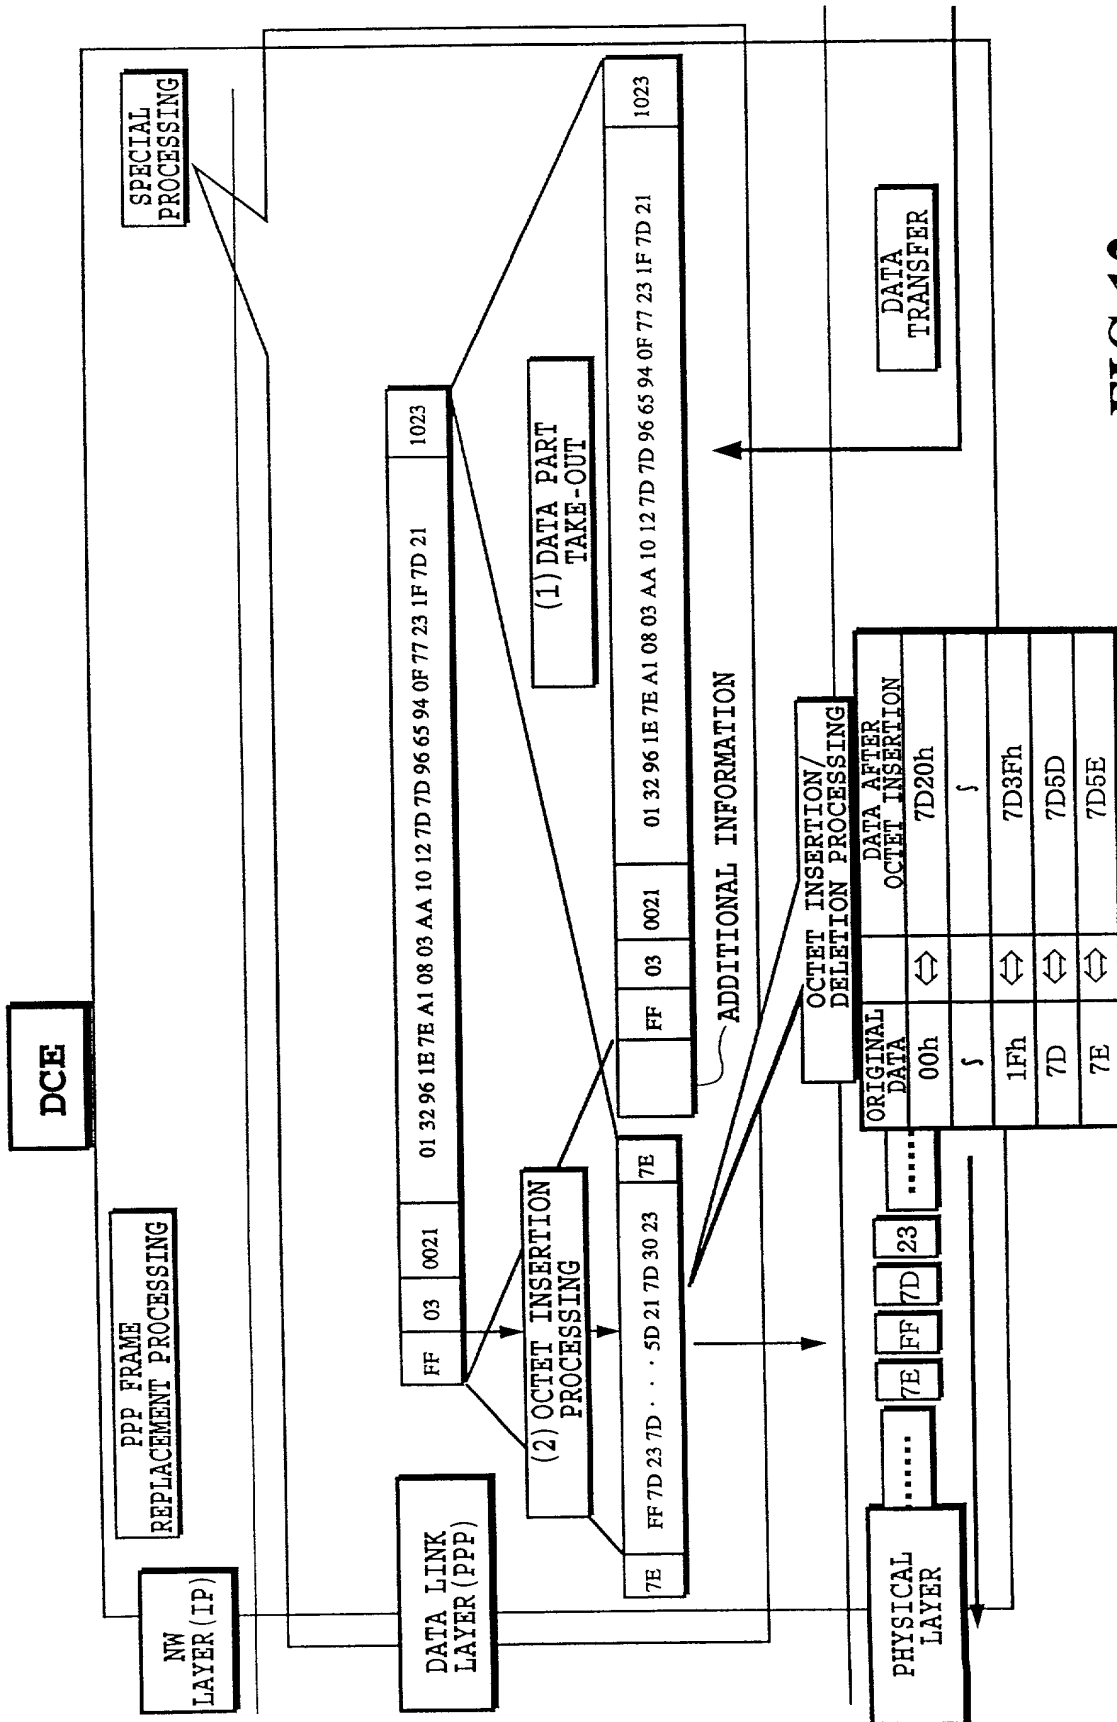


FIG.12

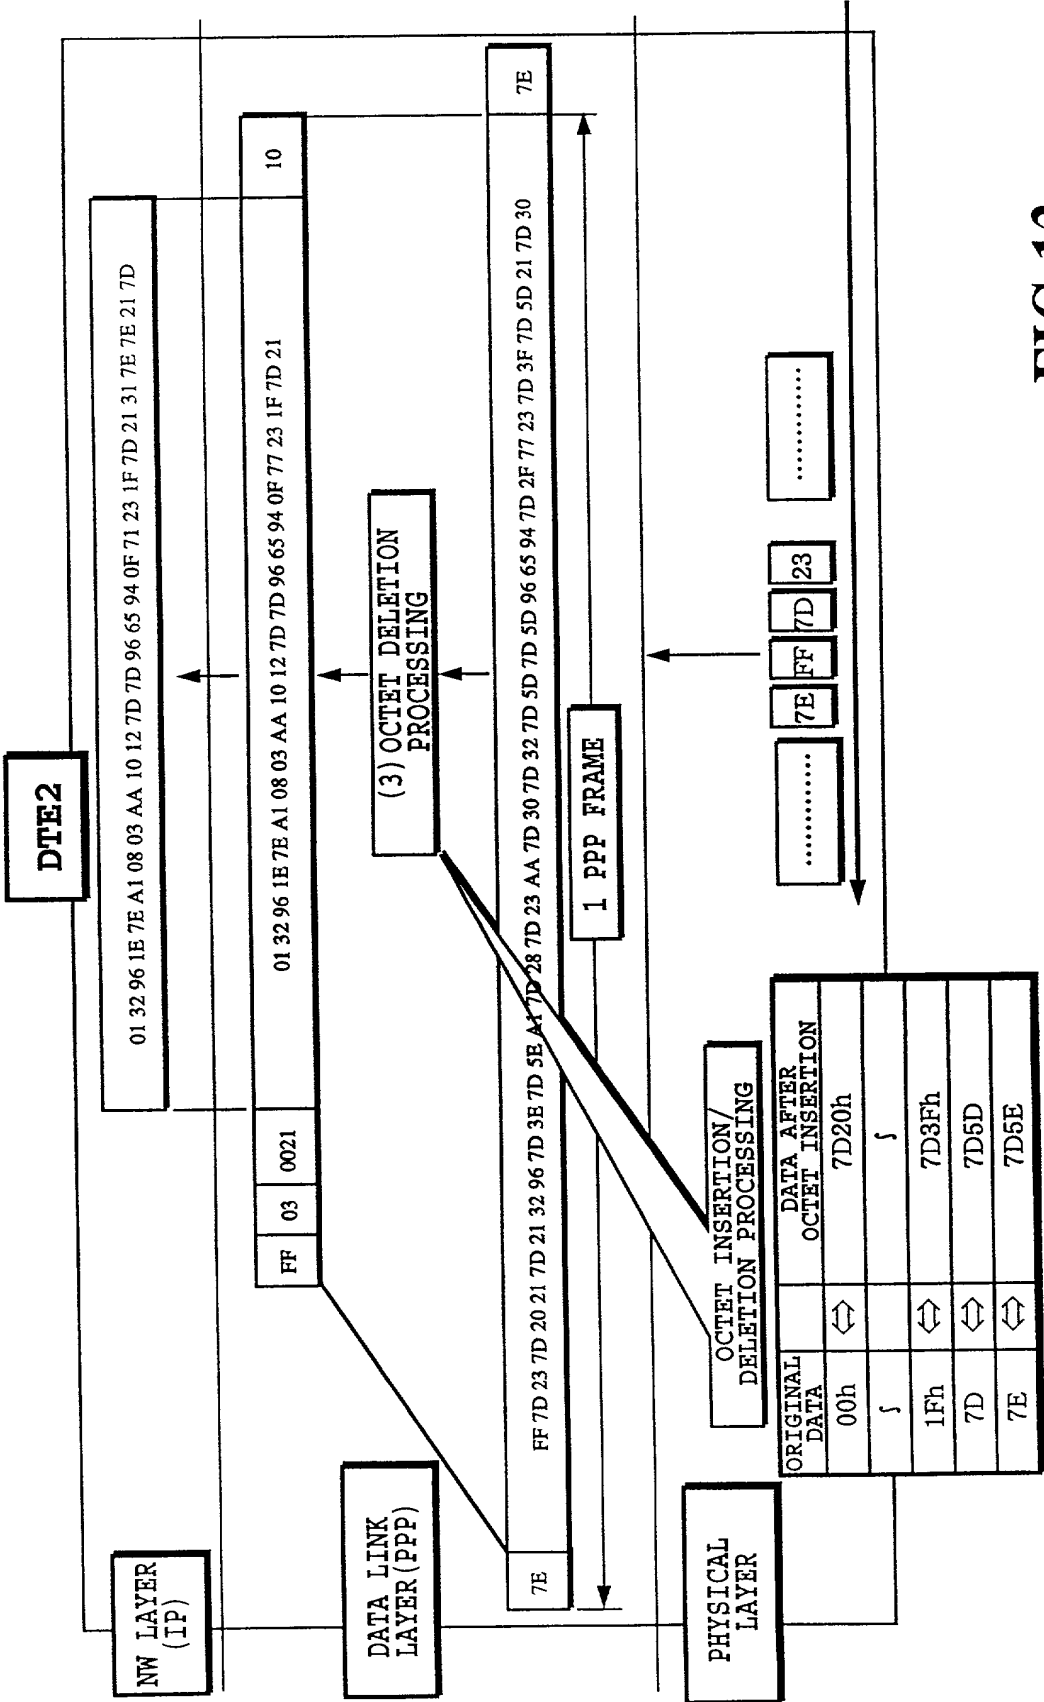


FIG.13

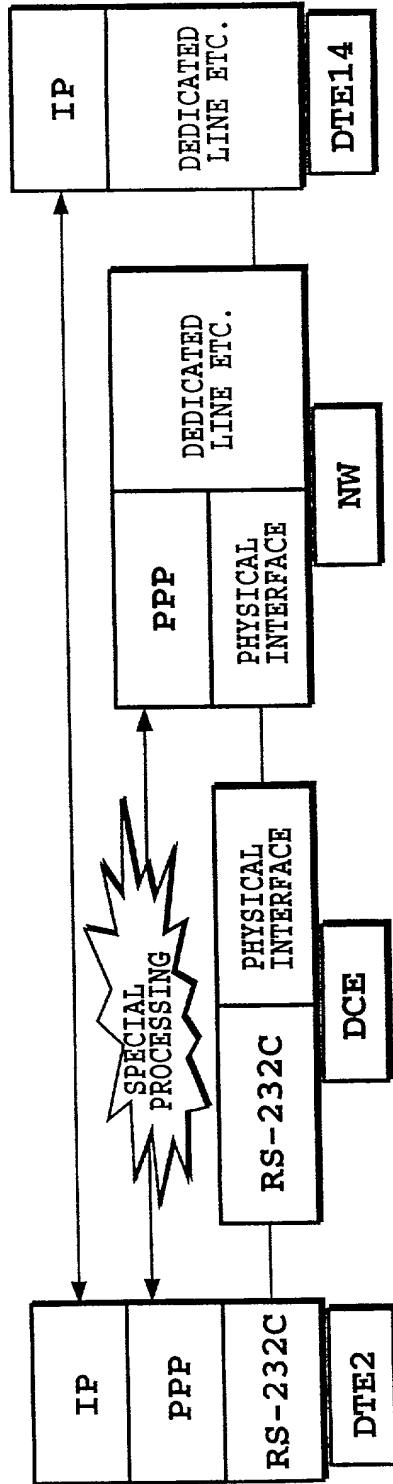


FIG.14

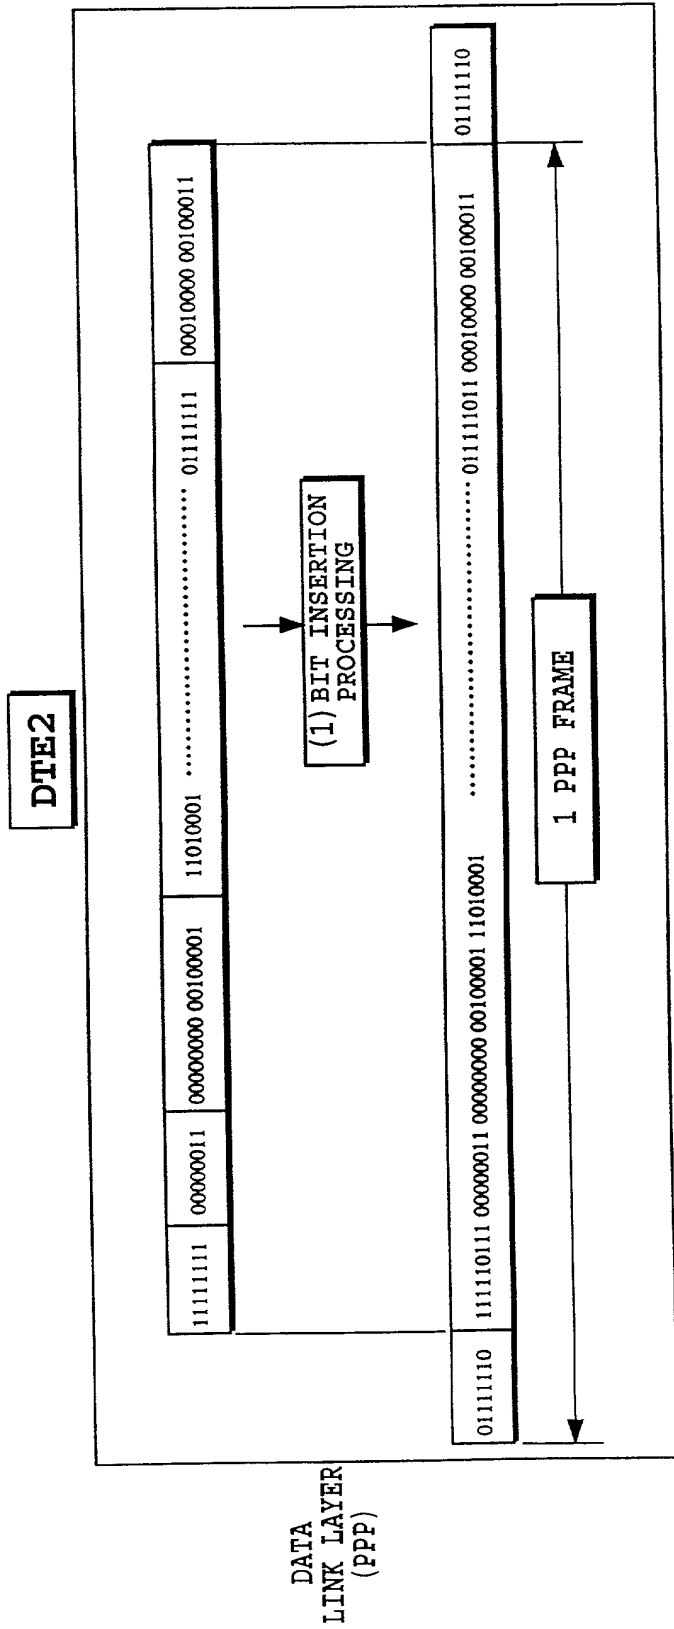


FIG.15

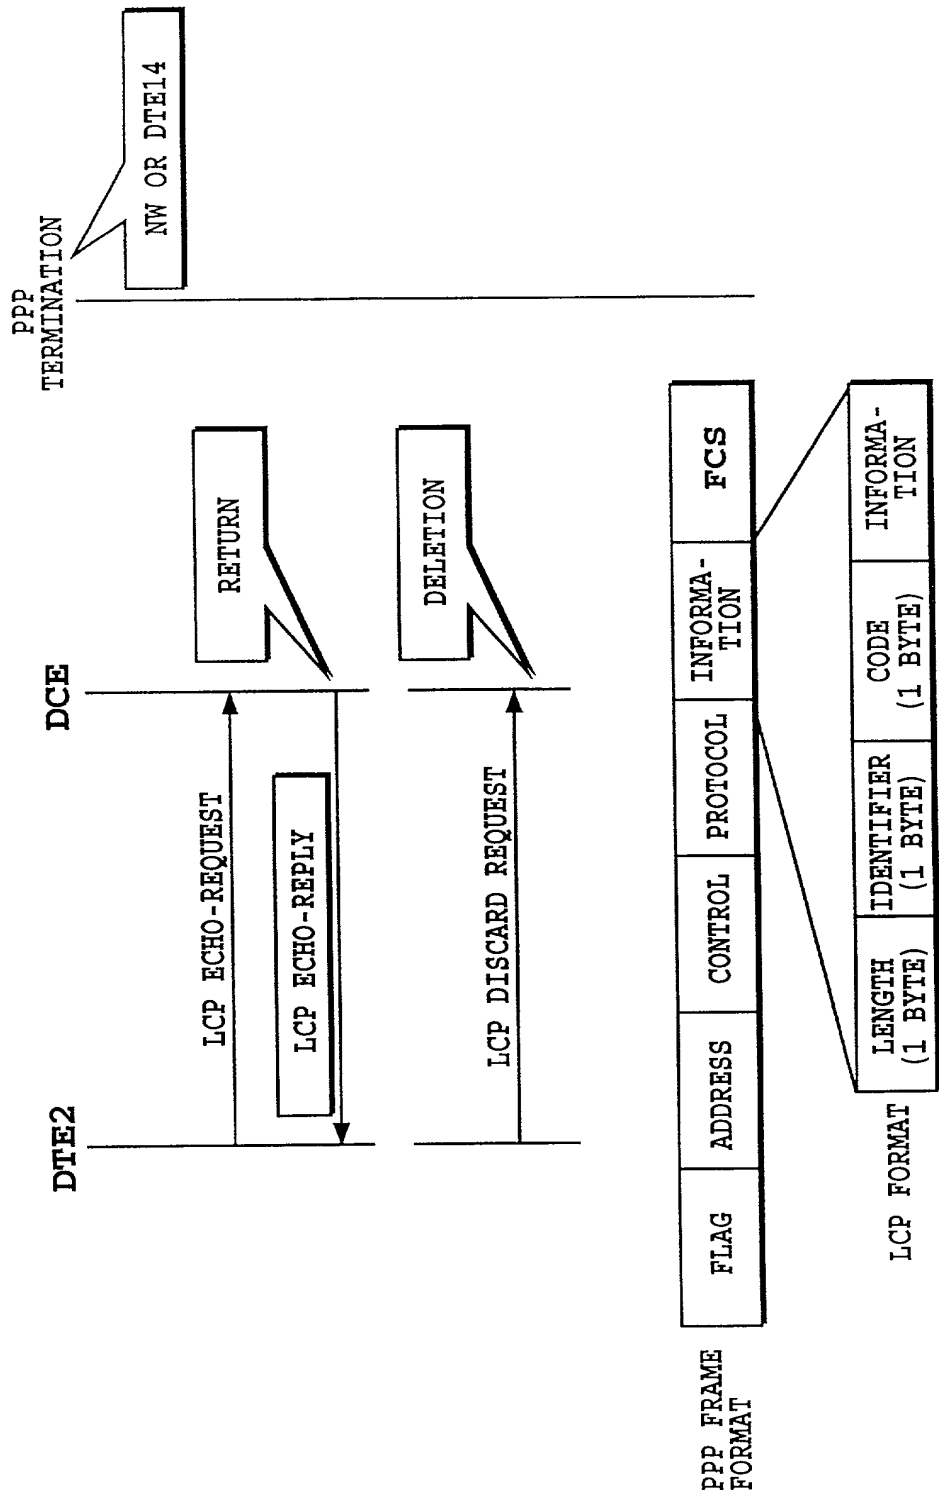


FIG.16

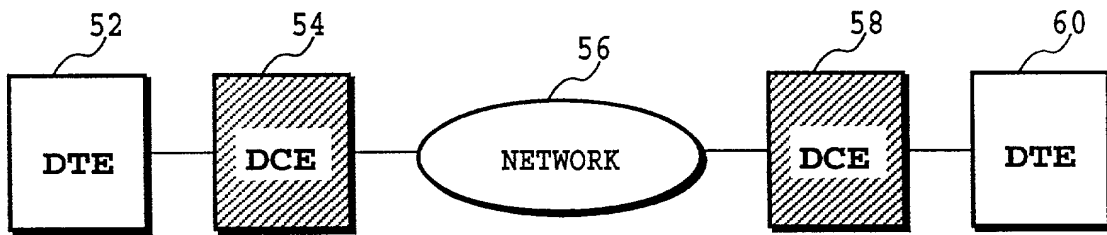


FIG.17

FLAG	ADDRESS	CONTROL	PROTOCOL	INFORMATION	FCS	FLAG
------	---------	---------	----------	-------------	-----	------

FIG.18

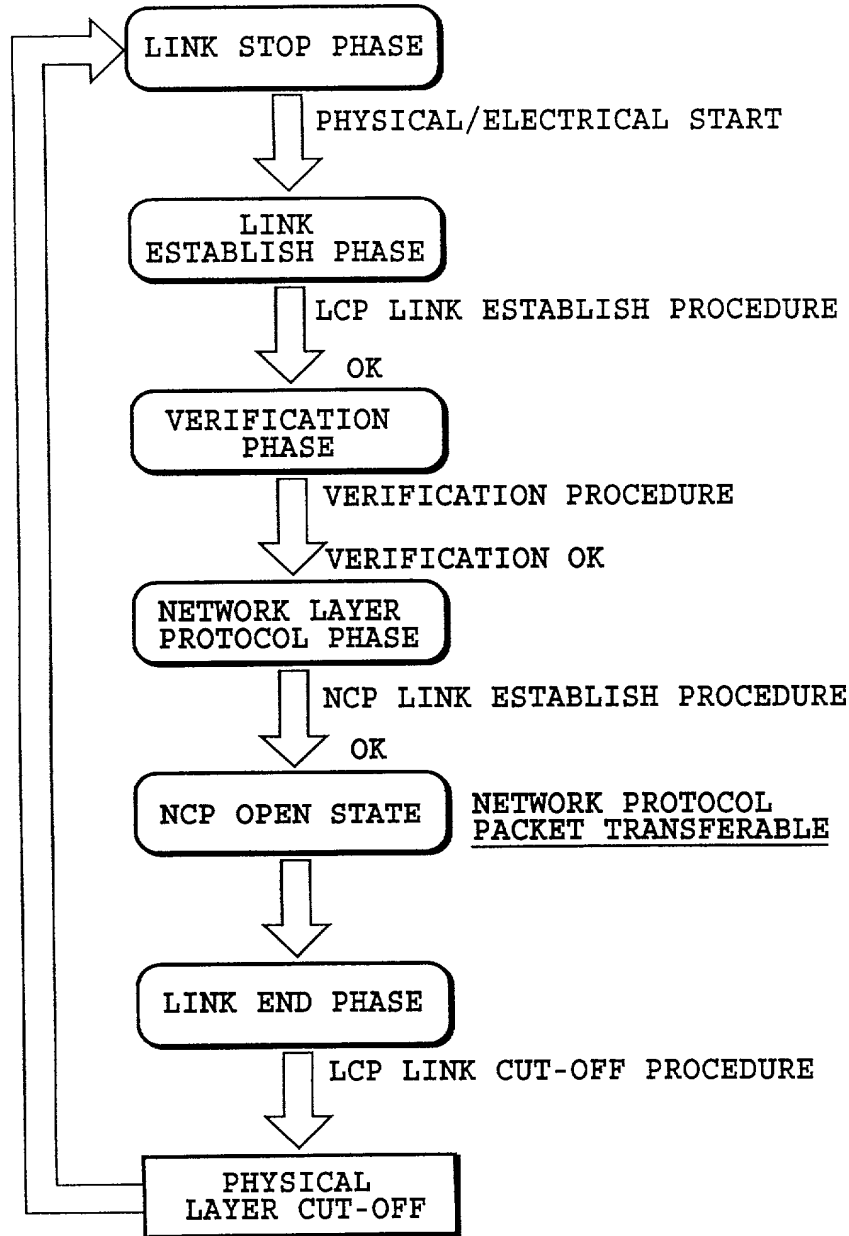


FIG.19

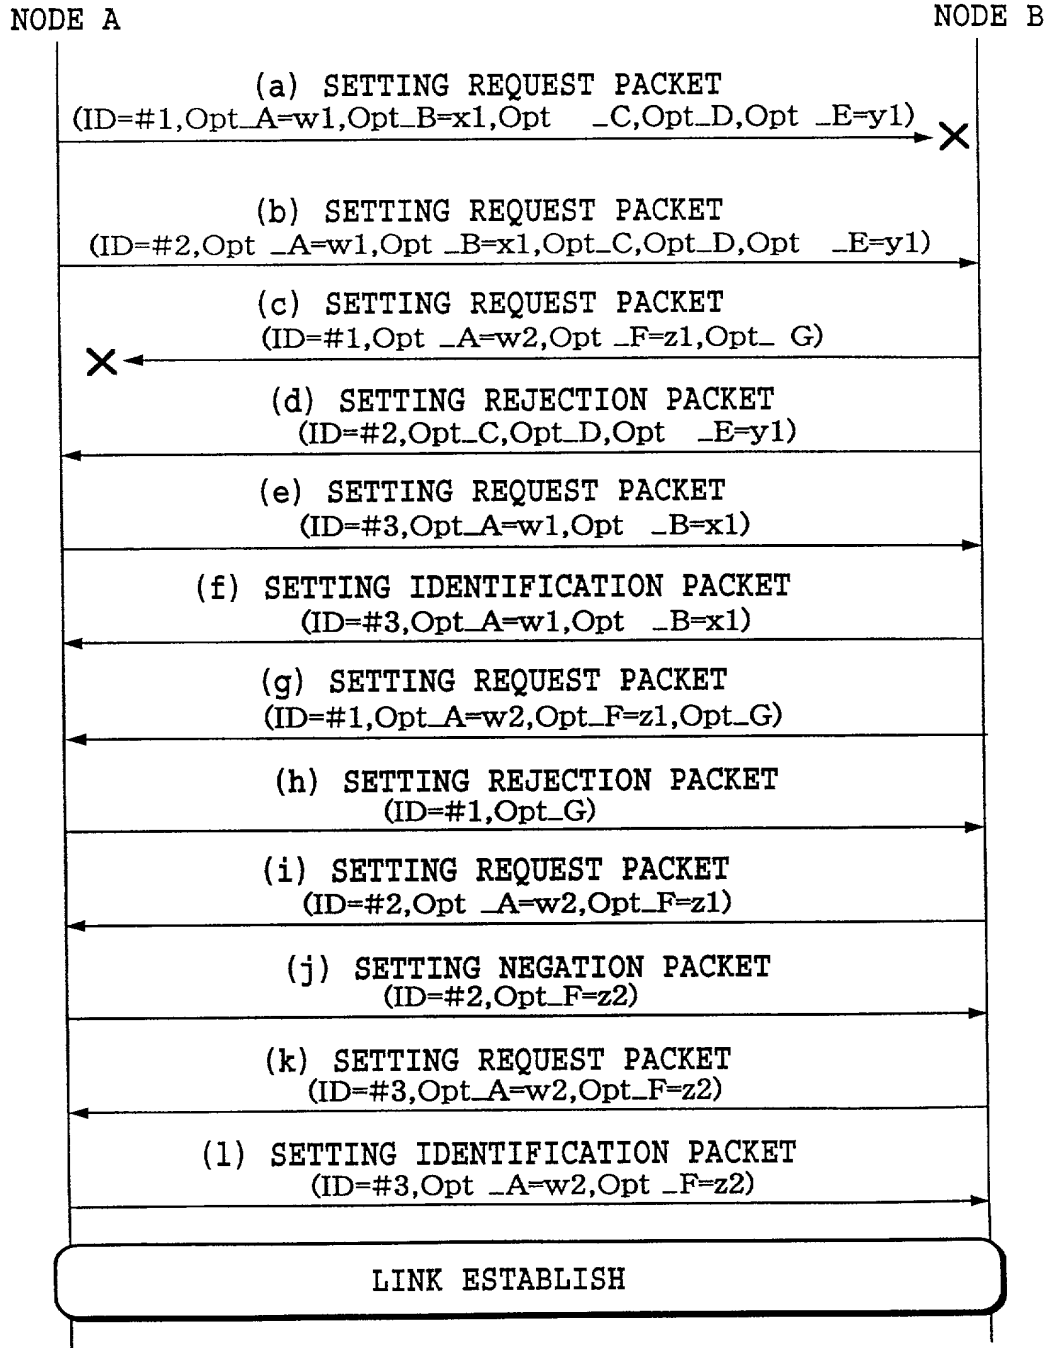


FIG.20

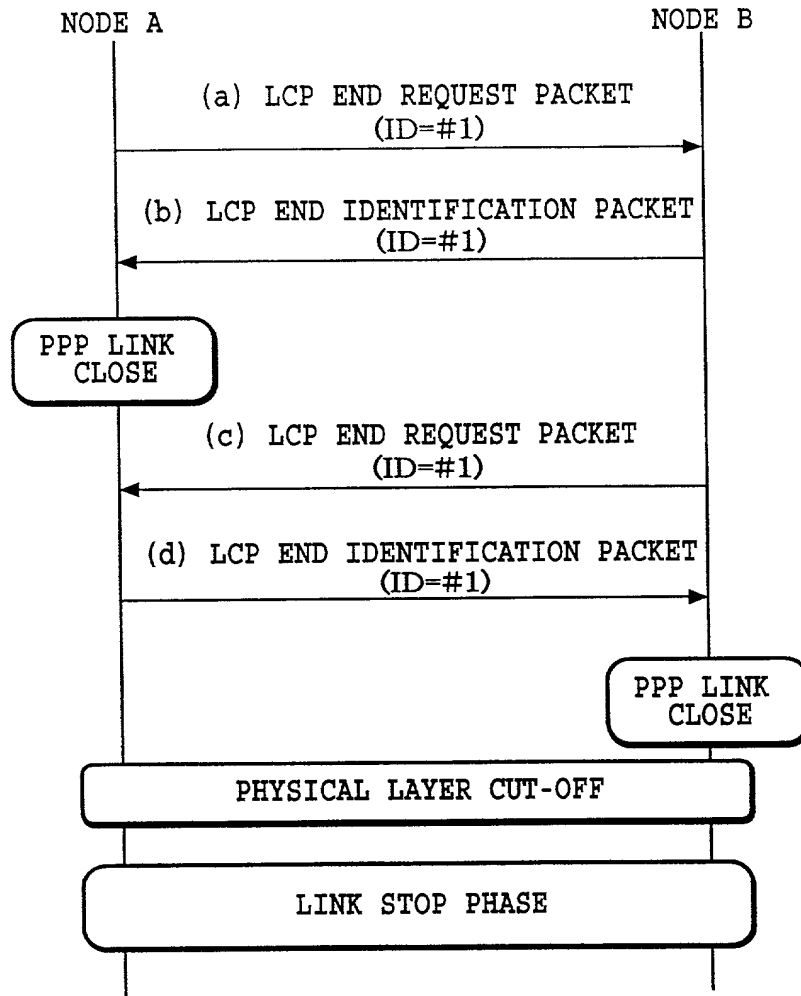


FIG.21

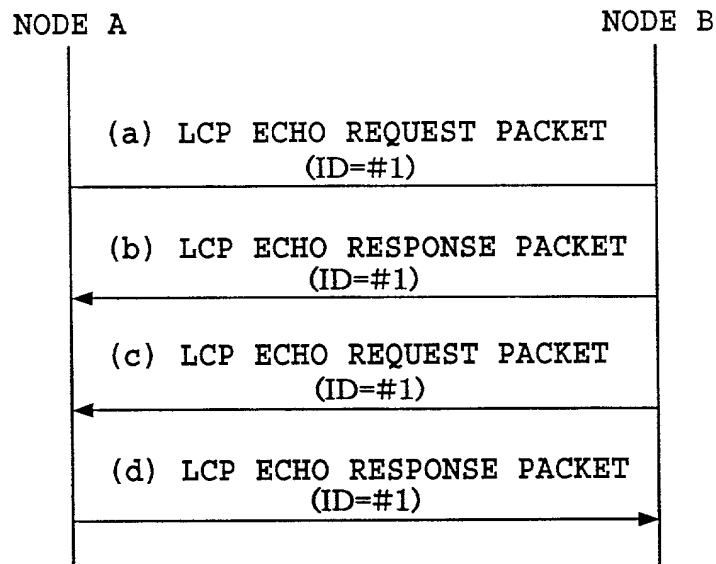


FIG.22

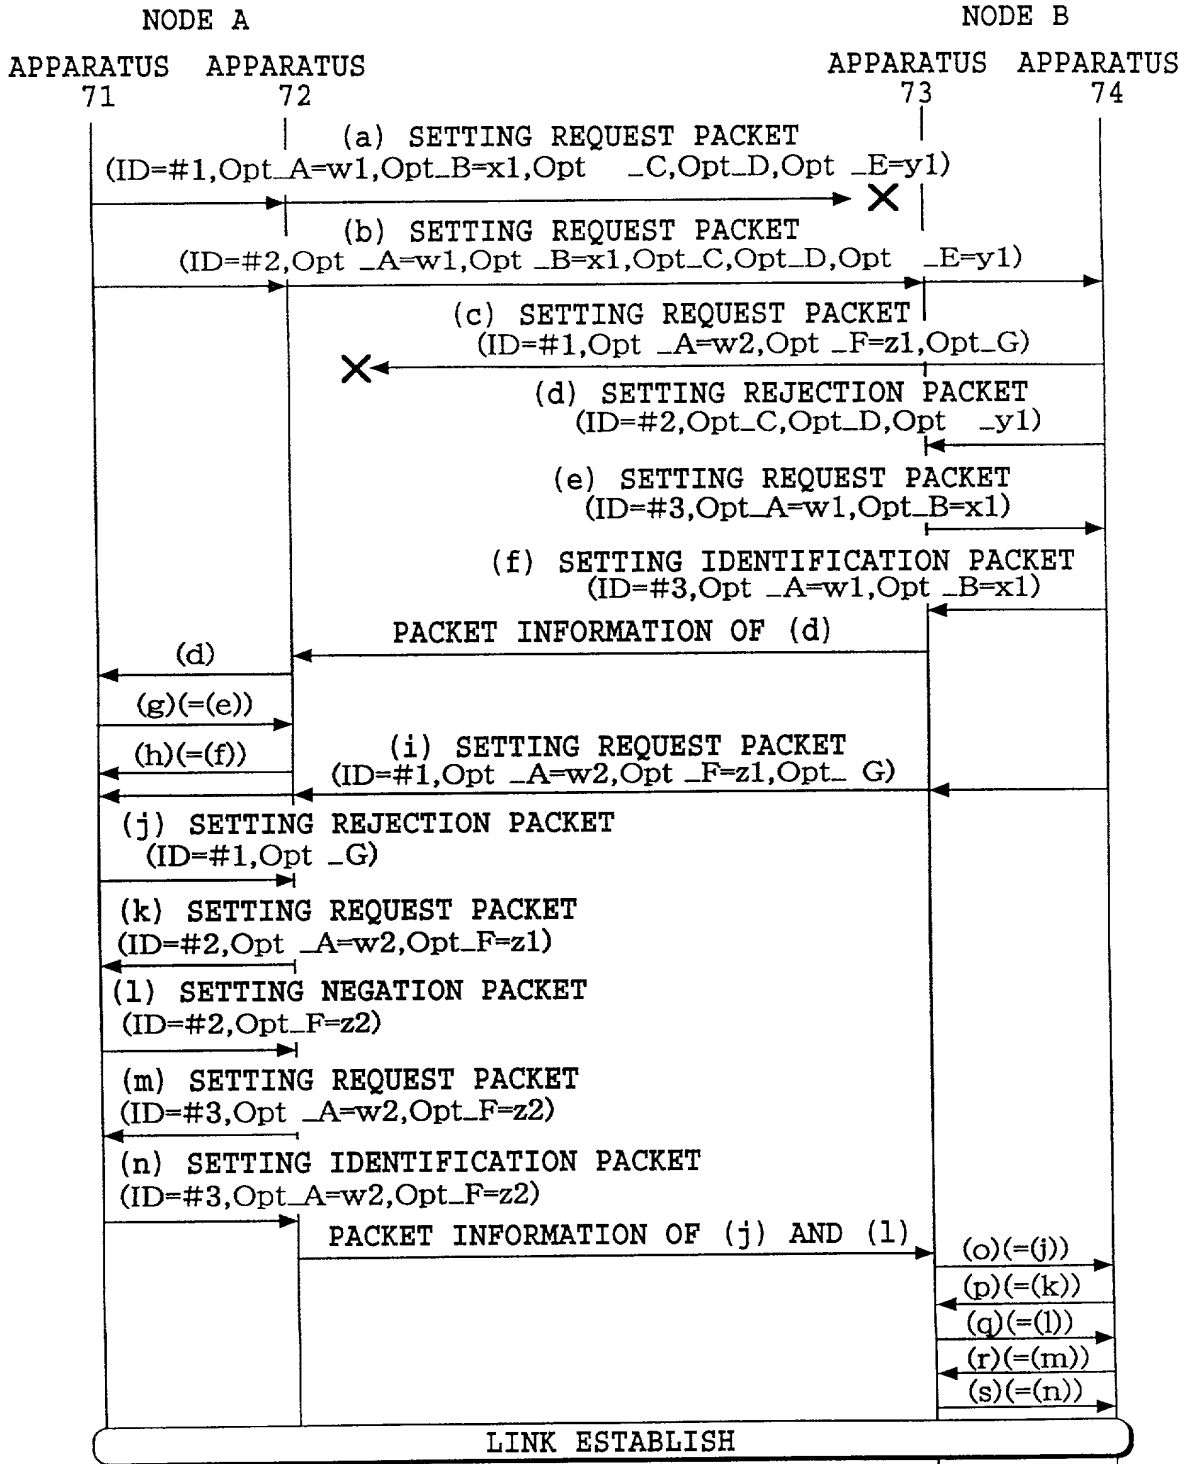


FIG.23

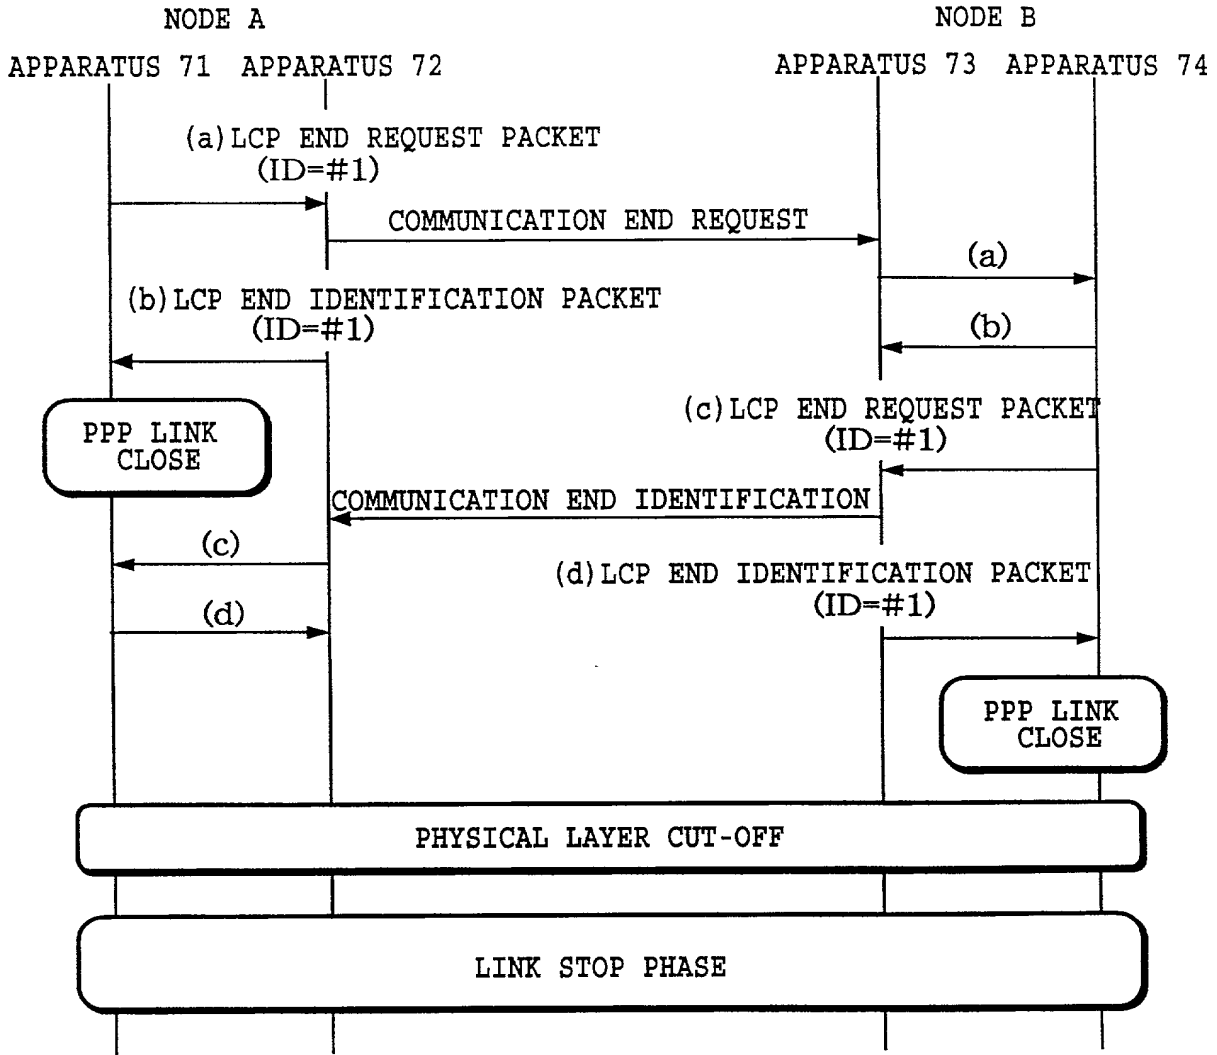


FIG.24

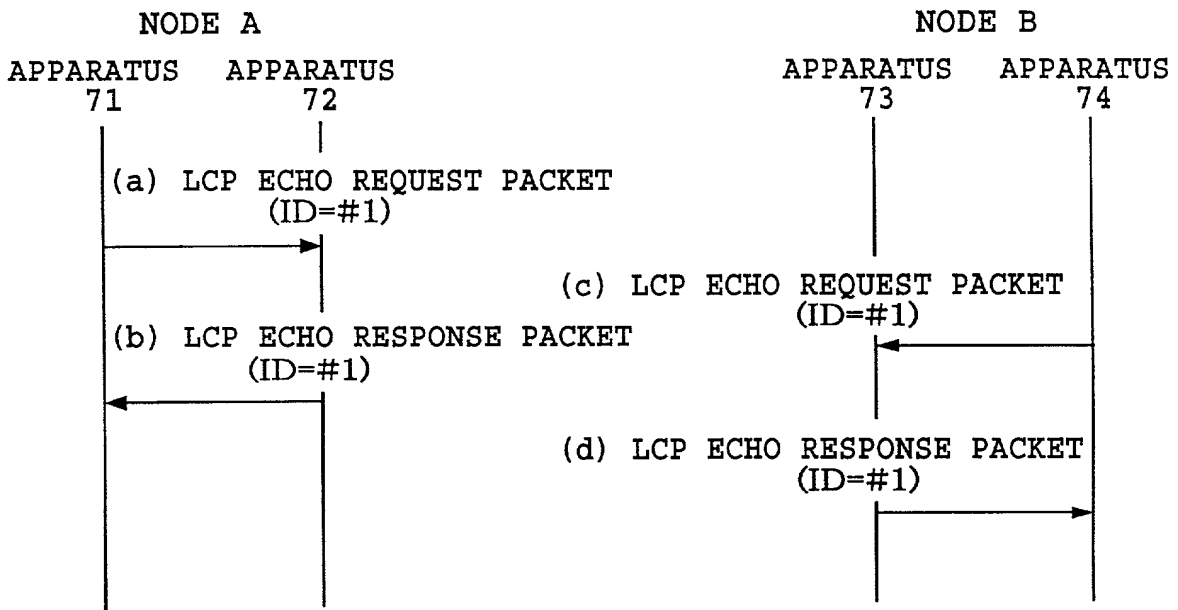


FIG.25